



Instruction Sheet

Model H5675

Wall Safe

Grizzly is proud to offer the Model H5675 Wall Safe. Please read through this instruction sheet to become familiar with your new safe.

This wall safe opens with a single tubular-style key. The overall dimensions are 18"W x 14"H x 3½"D, and this safe fits a wall opening of 14"W x 10¼" x 3¼"D

To install your safe:

1. Locate two studs in the wall you want to install your safe between.
2. Cut a 14"W x 10¼"H rectangle between the studs.
3. Install the safe into the hole and use the key to open the safe door.
4. With the safe in the wall, mark the mounting hole locations on the studs to use as a predrilling reference.
5. Remove the safe from the wall and predrill the studs with a ¼" hole.
6. Install the safe into the wall and secure the hinge side first with ⅜" lag bolts so it is flush against the side of the left stud. Note—*The length of your lag bolt will vary depending on your particular setup.*
7. Secure the other side of the safe to the right stud with the same type of hardware.

To lock your safe:

1. Insert the key and turn it counterclockwise.
2. Pull the safe open by using the key as a handle.

If you need additional help with this procedure, call our service department at: (570) 546-9663.



Figure 1. Wall Safe.

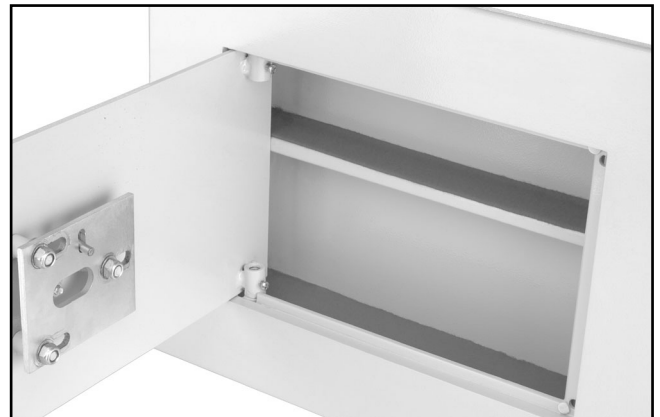


Figure 2. Inside view.

Key Serial Number