



MODEL T10492 TRAILER SPARE TIRE MOUNT INSTRUCTIONS

For questions or help with this product contact Tech Support at (570) 546-9663 or techsupport@grizzly.com

Introduction

The T10492 Spare Tire Mount provides convenient placement when mounting a spare tire to a trailer. It fits trailer tongues up to 3" wide and 4- or 5-lug tire hubs. The welded steel construction and easy installation make it an indispensable addition to your trailer.

Specifications

Size 22-1/4"L x 11"W x 11-1/2"H
Weight 5 lbs.

Inventory

Description	Qty
A. Mounting Bracket	1
B. Mounting Bar	2
C. Carriage Bolt 1/2"-20 (Tire Mounting)	2
D. Taper Hex Nut 1/2"-20 (Tire Mounting)	2
E. Lock Washer 1/2" (Tire Mounting)	2
F. Hex Bolt 7/16"-14 x 4 1/2" (Trailer Mounting) ...	4
G. Hex Nut 7/16"-14 (Trailer Mounting)	4
H. Lock Washer 7/16" (Trailer Mounting)	4
I. Flat Washer 7/16" (Trailer Mounting)	4


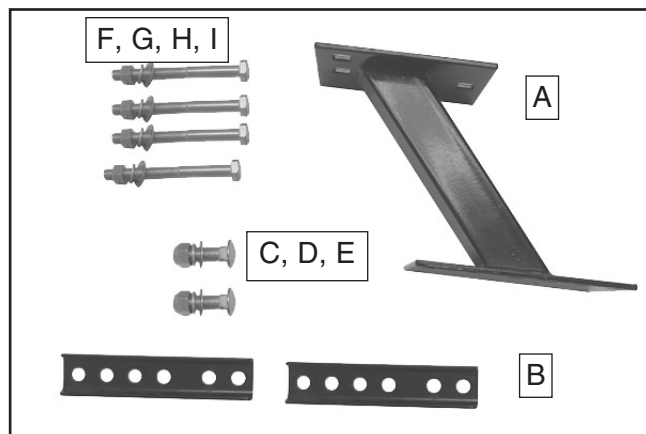


Figure 1. T10492 inventory.

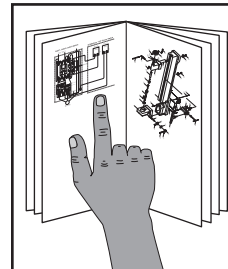

CAUTION

Be sure to read and understand all instructions for the spare tire mount. Install in compliance with all local codes and ordinances.

Installation

1. Choose a safe and convenient location on the trailer tongue to install the spare tire mount.
2. Attach the assembly to the trailer tongue using the 7/16"-14 x 4 1/2" hex bolts, 7/16"-14 hex nuts, 7/16" lock washers, and 7/16" flat washers, as shown in **Figure 2**.

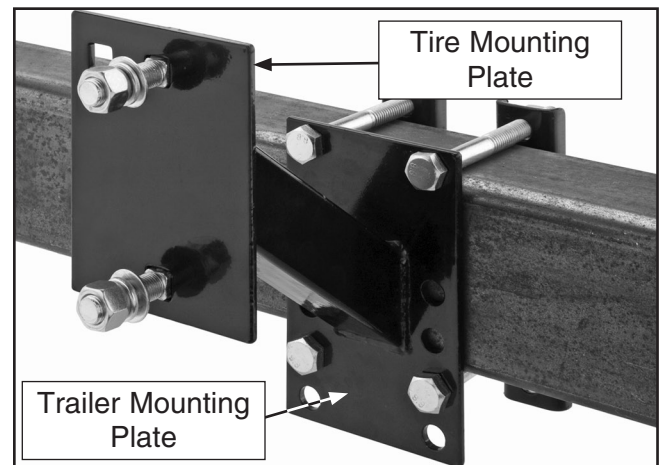


Figure 2. Attached assembly.

COPYRIGHT © OCTOBER, 2011 BY GRIZZLY INDUSTRIAL, INC.

WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE OR FORM WITHOUT THE WRITTEN APPROVAL OF GRIZZLY INDUSTRIAL, INC.

#KN14476 PRINTED IN CHINA

Installation (continued)

3. Tighten all hardware evenly so the mounting bars are parallel to the trailer mounting plate and each other.

NOTE: *There should be no play between the assembly and the trailer tongue.*

4. With the trailer wheels securely chocked or vehicle parking brake applied, test for play in the assembly by grasping the mounting bracket firmly and attempting to rock the trailer. Any movement should be felt through the entire trailer.

—If no play is felt, the assembly is secure.

—If play is felt, reposition the assembly, retighten the mounting hardware, and repeat **Step 4**.

Mounting Tire

CAUTION

Only use the provided hardware to fasten your spare tire to the mounting plate. Tighten all hardware to at least 90 ft/lbs. of torque to ensure safe and secure mounting.

To install a tire to the mount:

1. Refer to **Figure 3** for the two carriage bolt positions to use depending on the number of lugs on your spare tire.

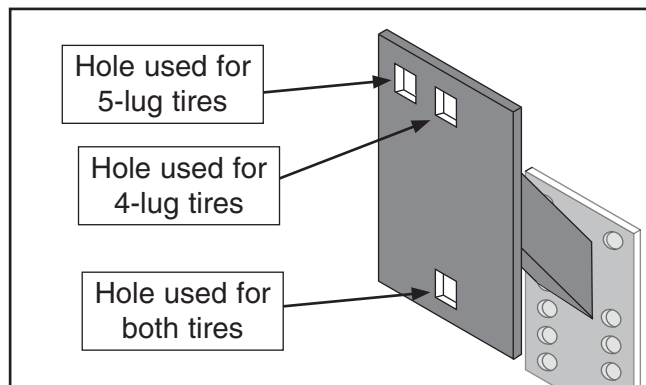


Figure 3. Hole orientation.

2. Insert the two carriage bolts into the mounting plate, and secure the wheel and hardware, as shown in **Figure 3**.

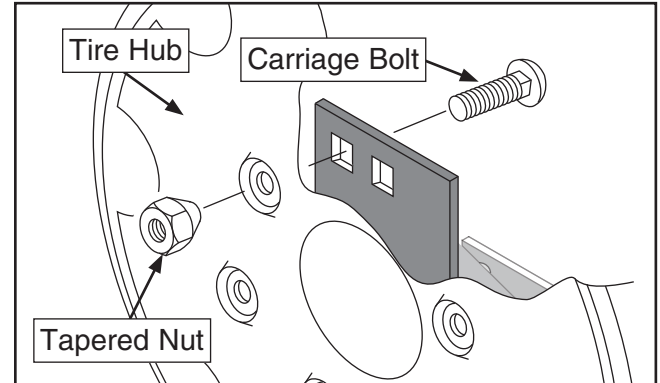


Figure 4. Cut-away view of the tire mounted with just the tapered nut.

NOTE: *If the tire lug holes do not have a tapered seat to receive the tapered nut, reverse the tapered nut, use the included 1/2" lock washers and flat washers, and mount the tire to the bracket, as shown in **Figure 4**.*

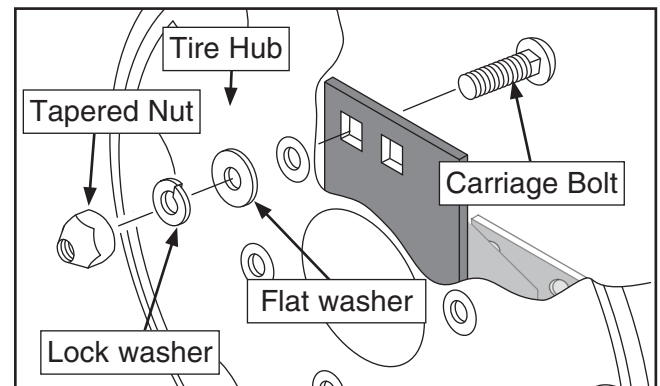


Figure 5. Cut-away view of tire mounted with the lock washer and flat washer mounted.

3. Tighten all hardware and ensure that the wheel is securely mounted.

