

Model D4788 15' Band Clamp Instruction Sheet



Phone #: (360) 734-3482 • Online Tech Support: techsupport@woodstockint.com • Web: www.woodstockint.com

Introduction

The 15' Band Clamp uses 1" wide nylon webbing with a ratcheting clamp assembly and 90° corner braces to apply even pressure all the way around difficult-to-clamp items.

Inventory

Description (Figure 1)	Qty
A. Nylon Webbing w/Ratchet Assembly	1
B. Corner Braces 90°	4

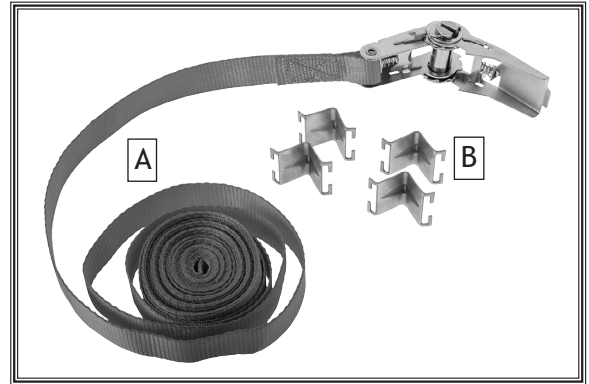


Figure 1. D4788 inventory.

Operation

1. Slide open end of nylon webbing through slot on ratchet assembly (see Figure 2).
2. Push webbing up and through handle opening on ratchet assembly (facing toward you) so webbing can double over itself in Step 4 (see Figure 2).
3. Place webbing and ratchet assembly loosely around item to be clamped.

Note: *If using corner braces, place webbing into two slots on outside of each brace, then align braces with corners.*

4. Pull loose end of webbing to take up slack, then lift ratchet assembly handle to double webbing over itself and ratchet to tighten to desired clamping tension.
5. To release webbing, open ratchet fully to 180°, press spring-loaded release tab on ratchet handle, then pull webbing out (see Figure 3).

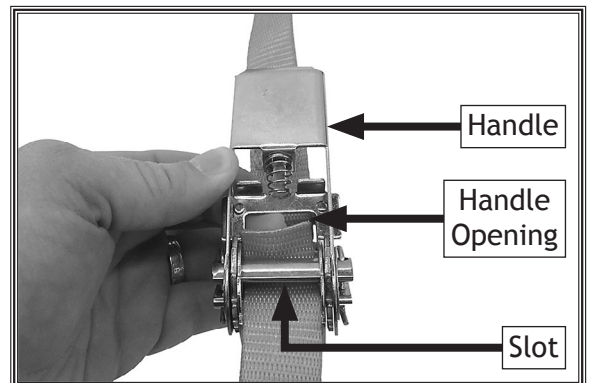


Figure 2. Nylon webbing pushed through slot and ratchet handle opening.

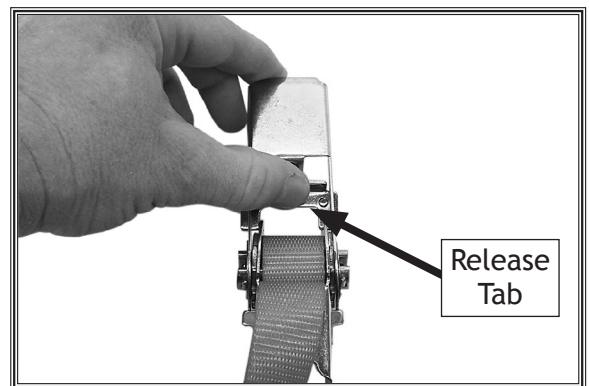


Figure 3. Releasing ratchet to remove webbing.

COPYRIGHT © JANUARY, 2019 BY WOODSTOCK INTERNATIONAL, INC.

WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE OR FORM WITHOUT THE WRITTEN APPROVAL OF WOODSTOCK INTERNATIONAL, INC.

#20100KB

Printed in China