



MODEL W1667

8½" Oscillating Drill Press



INSTRUCTION MANUAL

Phone: 1-360-734-3482 • On-Line Technical Support: tech-support@shopfox.biz

COPYRIGHT © 2000 BY WOODSTOCK INTERNATIONAL, INC. REVISED FEBRUARY, 2004.

**WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE OR FORM WITHOUT
THE WRITTEN APPROVAL OF WOODSTOCK INTERNATIONAL, INC.**

WARNING

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints.
- Crystalline silica from bricks, cement, and other masonry products.
- Arsenic and chromium from chemically treated lumber.

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

CONTENTS

| | |
|--|-----------|
| INTRODUCTION | 2 |
| About Your W1667 8 1/2" Oscillating Drill Press | 2 |
| Woodstock Service and Support | 2 |
| Warranty and Returns | 3 |
| Specifications | 3 |
| SAFETY | 4 |
| Standard Safety Instructions | 4 |
| Additional Safety Instructions for Drill Presses | 5 |
| Avoiding Potential Injuries | 6 |
| ELECTRICAL | 7 |
| 110V Operation | 7 |
| Grounding | 7 |
| Extension Cords | 7 |
| ASSEMBLY | 8 |
| Box Contents | 8 |
| Base and Column | 9 |
| Dust Port | 9 |
| Table | 10 |
| Headstock | 11 |
| Drill Chuck | 12 |
| Handles | 12 |
| ADJUSTMENTS | 13 |
| Belt Tension | 13 |
| Feed Shaft Spring Tension | 14 |
| Quill-Shaft Screw | 15 |
| Table Height / Tilt | 16 |
| Drilling Speed | 17 |
| Drill Press RPM Chart | 18 |
| Drilling Depth | 18 |
| Drill, Cutter, and Hole Saw Suggested RPM Chart | 19 |
| OPERATIONS | 21 |
| Starting the Drill Press | 21 |
| Drill/Drum Changes | 22 |
| Using the Oscillator | 23 |
| MAINTENANCE | 25 |
| General | 25 |
| Lubrication | 25 |
| Table and Base | 25 |
| Sanding Sleeves | 25 |
| Troubleshooting | 26 |
| Parts Diagram | 27 |
| Parts List | 28 |
| Drill Press Accessories | 29 |



INTRODUCTION

About Your W1667 8 1/2" Oscillating Drill Press

This new **SHOP FOX®** Model W1667 8 1/2" Oscillating Drill Press has been specially designed by Woodstock International, Inc. to provide many years of trouble free service. Close attention to detail, ruggedly built parts and a rigid quality control program assure safe and reliable operation.

The Model W1667 8 1/2" Oscillating Drill Press is a drill press and an oscillating sander in one compact machine. It is capable of a wide variety of drilling and sanding operations. A sanding spindle is included for use with drums ranging in size from 1" to 2" diameter and 4 1/4" long. Purchasing drums and sleeves will allow you to sand small or finely detailed pieces; and with the oscillating feature, your abrasives will last longer and provide a better finish. The tilting table allows surfaces to be sanded at many different angles. Included are table inserts to give maximum support for the workpiece and a dust port for connection to your dust collection system. The Model W1667 is packaged with a drill chuck, motor and paddle switch with removable safety key.

Woodstock International, Inc. is committed to customer satisfaction in providing this manual. It is our intent to make sure all the information necessary for safety, ease of assembly, practical use and durability of this product be included.

If you need the latest revised edition of this manual, you can download it from <http://www.shopfox.biz>. If you still have questions after reading the latest revised manual, or if you have comments please contact us at:

**Woodstock International, Inc.
Attn: Technical Department
P.O. Box 2309
Bellingham, WA 98227**

Woodstock Service and Support

We stand behind our machines! In the event that a defect is found, parts are missing or questions arise about your machine, please contact Woodstock International Service and Support at 1-360-734-3482 or at tech-support@shopfox.biz. Our knowledgeable staff will help you troubleshoot problems, send out parts or arrange warranty returns.

Warranty and Returns

Woodstock International, Inc. warrants all **SHOP FOX®** machinery to be free of defects from workmanship and materials for a period of 2 years from the date of original purchase by the original owner. This warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence or accidents, lack of maintenance, or to repair or alterations made or specifically authorized by anyone other than Woodstock International, Inc.

Woodstock International, Inc. will repair or replace, at its expense and at its option, the **SHOP FOX®** machine or machine part which in normal use has proven to be defective, provided that the original owner returns the product prepaid to the **SHOP FOX®** factory service center or authorized repair facility designated by our Bellingham, WA office, with proof of their purchase of the product within 2 years, and provides Woodstock International, Inc. reasonable opportunity to verify the alleged defect through inspection. If it is determined there is no defect, or that the defect resulted from causes not within the scope of Woodstock International Inc.'s warranty, then the original owner must bear the cost of storing and returning the product.

This is Woodstock International, Inc.'s sole written warranty and any and all warranties that may be implied by law, including any merchantability or fitness, for any particular purpose, are hereby limited to the duration of this written warranty. We do not warrant that **SHOP FOX®** machinery complies with the provisions of any law or acts. In no event shall Woodstock International, Inc.'s liability under this warranty exceed the purchase price paid for the product, and any legal actions brought against Woodstock International, Inc. shall be tried in the State of Washington, County of Whatcom. We shall in no event be liable for death, injuries to persons or property or for incidental, contingent, special or consequential damages arising from the use of our products.

Every effort has been made to ensure that all **SHOP FOX®** machinery meets high quality and durability standards. We reserve the right to change specifications at any time because of our commitment to continuously improve the quality of our products.

Specifications

| | |
|-------------------------------------|---|
| Motor Type: | TEFC Capacitor Start Induction |
| Motor: | 1½ HP, 110V, 5 Amp., Single Phase / 60 Hz |
| RPM: | 1725 |
| Power Transfer: | V-Belt Drive |
| Bearings: | Shielded & Lubricated Ball Bearings |
| Switch: | Toggle ON/OFF Switch, W/ Safety Lock Tab |
| Oscillating Stoke Length: | 1½" |
| Spindle Travel: | 1 5⁄8" |
| Maximum Distance, Spindle to Base: | 11" |
| Maximum Distance, Spindle to Table: | 8" |
| Overall Height: | 23" |
| Dust Port Size: | 2 1⁄4" |
| Spindle Taper: | JT-33 |
| Table Swing: | 8 1⁄2" |
| Table Tilt: | 90° |
| Chuck Size: | 1½" (1-13mm JT-33), Keyed |
| Speeds: | 5, Belt Controlled |
| Range of Speeds: | 620, 1100, 1720, 2340, 3100 RPM |
| Drilling Capacity: | 1½" Diameter in Steel |
| Approximate Shipping Weight: | 54 lbs. |

SAFETY

READ MANUAL BEFORE OPERATING MACHINE FAILURE TO FOLLOW INSTRUCTIONS BELOW WILL RESULT IN PERSONAL INJURY



Indicates an imminently hazardous situation which, if not avoided, **WILL** result in death or serious injury.



Indicates a potentially hazardous situation which, if not avoided, **COULD** result in death or serious injury.



Indicates a potentially hazardous situation which, if not avoided, **MAY** result in minor or moderate injury and damage to the machine. It may also be used to alert against unsafe practices.

NOTICE

This symbol is used to alert the user to useful information about proper operation of the equipment.

Standard Safety Instructions

1. **Thoroughly read the instruction manual before operating your machine.** Learn the applications, limitations and potential hazards of this machine. Keep manual in a safe, convenient place for future reference.
2. **Keep work area clean and well lighted.** Clutter and inadequate lighting invite potential hazards.
3. **Ground all tools.** If a machine is equipped with a three-prong plug, it must be plugged into a three-hole electrical outlet or grounded extension cord. If using an adapter to aid in accommodating a two-hole receptacle, ground the adapter using a screw to a known ground.
4. **Wear eye protection at all times.** Use safety glasses with side shields or safety goggles, meeting the national safety standards, while operating this machine.
5. **Avoid dangerous environments. DO NOT** operate this machine in wet or open flame environments. Airborne dust particles could cause an explosion and severe fire hazard.
6. **Ensure all guards are securely in place** and in working condition.
7. **Make sure switch is in the "OFF" position** before connecting power to machine.
8. **Keep work area clean;** free of clutter, grease, etc.
9. **Keep children and visitors away.** All visitors should be kept at a safe distance away while operating unit.
10. **Childproof workshop** with padlocks, master switches or by removing starter keys.
11. **Disconnect machine when cleaning, adjusting or servicing.**

12. **DO NOT force tool.** The machine will do a safer and better job at the rate for which it was designed.
13. **Use correct tool. DO NOT force machine or attachment to do a job for which it was not designed.**
14. **Wear proper apparel. DO NOT wear loose clothing, neck ties, gloves, jewelry, etc.**
15. **Remove adjusting keys and wrenches.** Before turning the machine on, make it a habit to check that all adjusting keys and wrenches have been removed.
16. **Use proper extension cord.** When using an extension cord, make sure it is in good condition. When extension cord is 100' and less in length, use those that are rated Standard Service (grade S) or better, and that have a conductor size of 16 A.W.G. A drop in line voltage, loss of power and overheating can result when using an undersized cord. The extension cord should have a ground wire and ground plug pin, as well.
17. **Keep proper footing and balance at all times.**
18. **DO NOT leave machine unattended.** Wait until it comes to a complete stop before leaving the area.
19. **Perform machine maintenance and care.** Follow lubrication and accessory attachment instructions in the manual.
20. **Keep machine away from open flame.** Operating machines near pilot lights and/or open flames creates a high risk if dust is dispersed in the area. Dust particles and an ignition source may cause an explosion. Do not operate the machine in high risk areas, including but not limited to, those mentioned above.

Additional Safety Instructions for Drill Presses

1. **Always operate your drill press at speeds that are appropriate for the drill bit size and the material that you are drilling.**
2. **Feed the drill bit evenly into the workpiece.** Back the bit out of deep holes and clear the chips with a brush after you have turned the machine off.
3. **Make sure the drill bit you are using is tightened properly.** Use only round, hex or triangular shank drill bits.
4. **Never do maintenance or change speeds with this machine plugged in.**
5. **Never use tools that are in poor condition.** Cutting tools that are dull or damaged are difficult to control and may cause serious injury.
6. **Never drill sheet metal unless it is clamped securely to the table.**
7. **Properly position workpieces to avoid drilling into the table.**
8. **A face guard used with safety glasses is recommended.**
9. **Always clamp workpiece securely to table before drilling.** Never hold a workpiece by hand while drilling.
10. **Always remove handles before using oscillating feature.**
11. **Habits - good and bad - are hard to break.** Develop good habits in your shop and safety will become second-nature to you.

Avoiding Potential Injuries

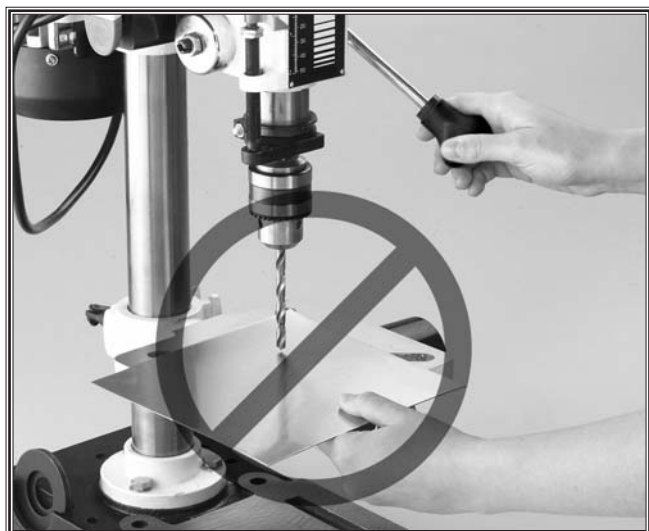


Figure 1. Never drill while holding the workpiece by hand.

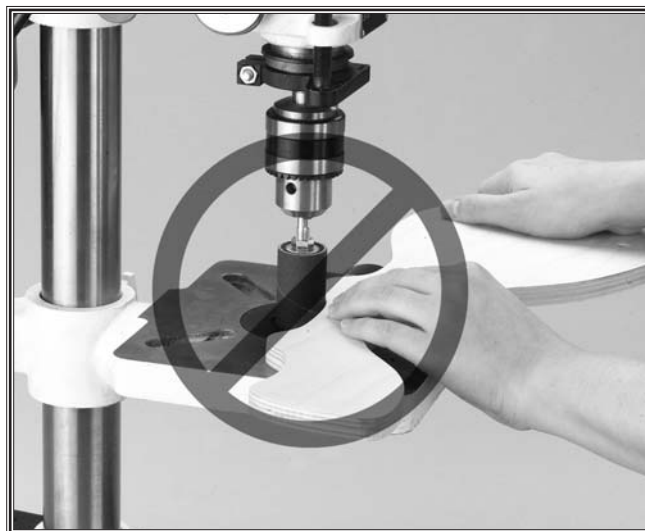


Figure 2. Keep fingers away from spinning drill bits, cutters, and sanding surfaces.



Figure 3. Remove switch safety key when not in use.



Figure 4. Remove handles when using the oscillating sanding feature.

ELECTRICAL

110V Operation

The SHOP FOX® W1667 8 1/2" Oscillating Drill Press can only be operated at 110 volts (see Figure 5). The motor draws approximately 5 amps. Choose an outlet with a 10 amp circuit breaker or fuse protection. Remember circuits being used by other machines at the same time add to the total electrical load being applied by this machine. If this total amperage load exceeds the amperage rating of the circuit breaker or fuse, use a different circuit with a higher amperage rating.

DO NOT modify an existing low-amperage circuit by only replacing the circuit breaker with a breaker rated for a higher amperage. The breaker and the complete circuit must be replaced by a qualified electrician.

Grounding

Ground this machine! The electrical cord supplied with the W1667 8 1/2" Oscillating Drill Press comes with a grounding pin. **DO NOT** remove the pin if your outlet does not accept a ground pin, see Figure 5a. Have the outlet box replaced by a qualified electrician or have an appropriate adapter installed. Remember, an adapter with a grounding wire does not guarantee the machine will be grounded. A ground source must always be verified in the electrical circuit within the wall or conduit.

Extension Cords

Using an extension cord with an undersized gauge or one that is too long, generates heat in the cord that may cause fire or circuit damage. If you must use an extension cord, use the guidelines below to determine the correct cord length and gauge. The amp rating of the motor is 9 amps and can be found on its nameplate.

- Use a cord rated for Standard Service (Grade S)
- Use a cord that is 16 gauge and 100 feet or less only
- Use a cord with a ground wire and pin
- Use only undamaged cords

⚠ WARNING

DISCONNECT power to machine before performing any electrical or mechanical service or maintenance. Seek assistance from a qualified electrician if you do not understand the wiring diagram in this manual. Always follow the applicable electrical codes and standards. Otherwise serious personal injury or death may occur!

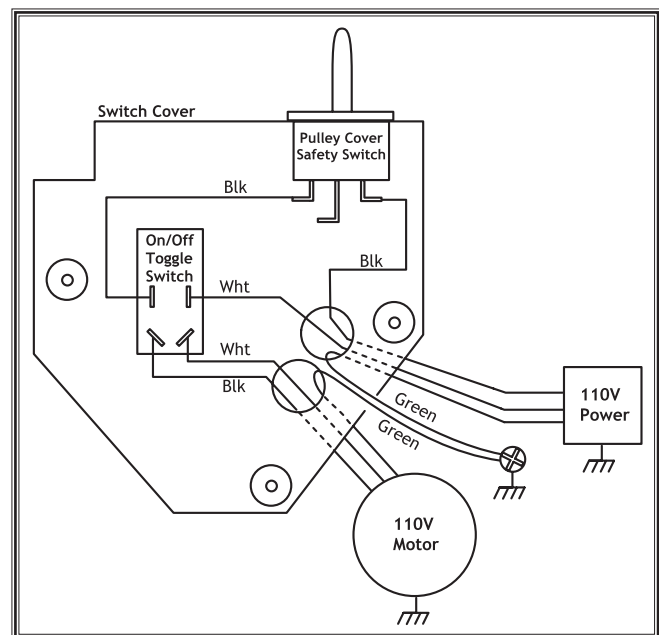


Figure 5. Model W1667 wiring diagram.


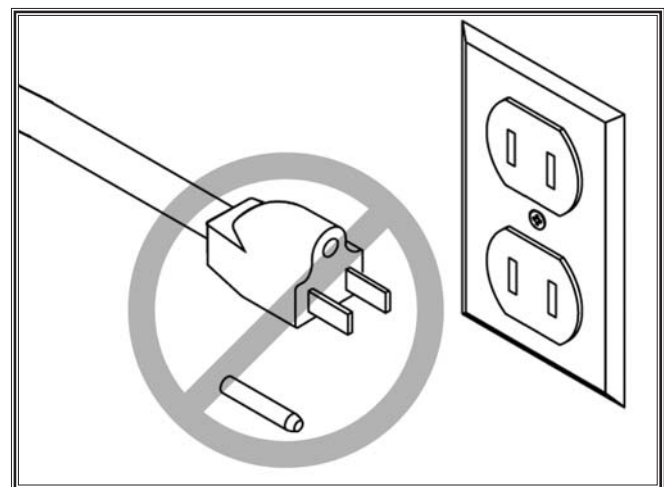


Figure 5a. Never remove grounding pin.

ASSEMBLY



! WARNING

UNPLUG machine before any assembly procedures. Otherwise serious personal injury may occur!



! WARNING

WEAR safety glasses during all assembly procedures. Otherwise serious personal injury may occur!

Box Contents

The following is a list of the components shipped with the W1667 8 1/2" Oscillating Drill Press. Inventory the components in a similar fashion as shown in Figure 6, and assembly will be quicker and easier. If any part is missing, examine the packaging carefully and check under the belt guard. If any parts are still missing, contact Woodstock International, Inc. at 1-360-734-3482 or tech-support@shop-fox.biz.

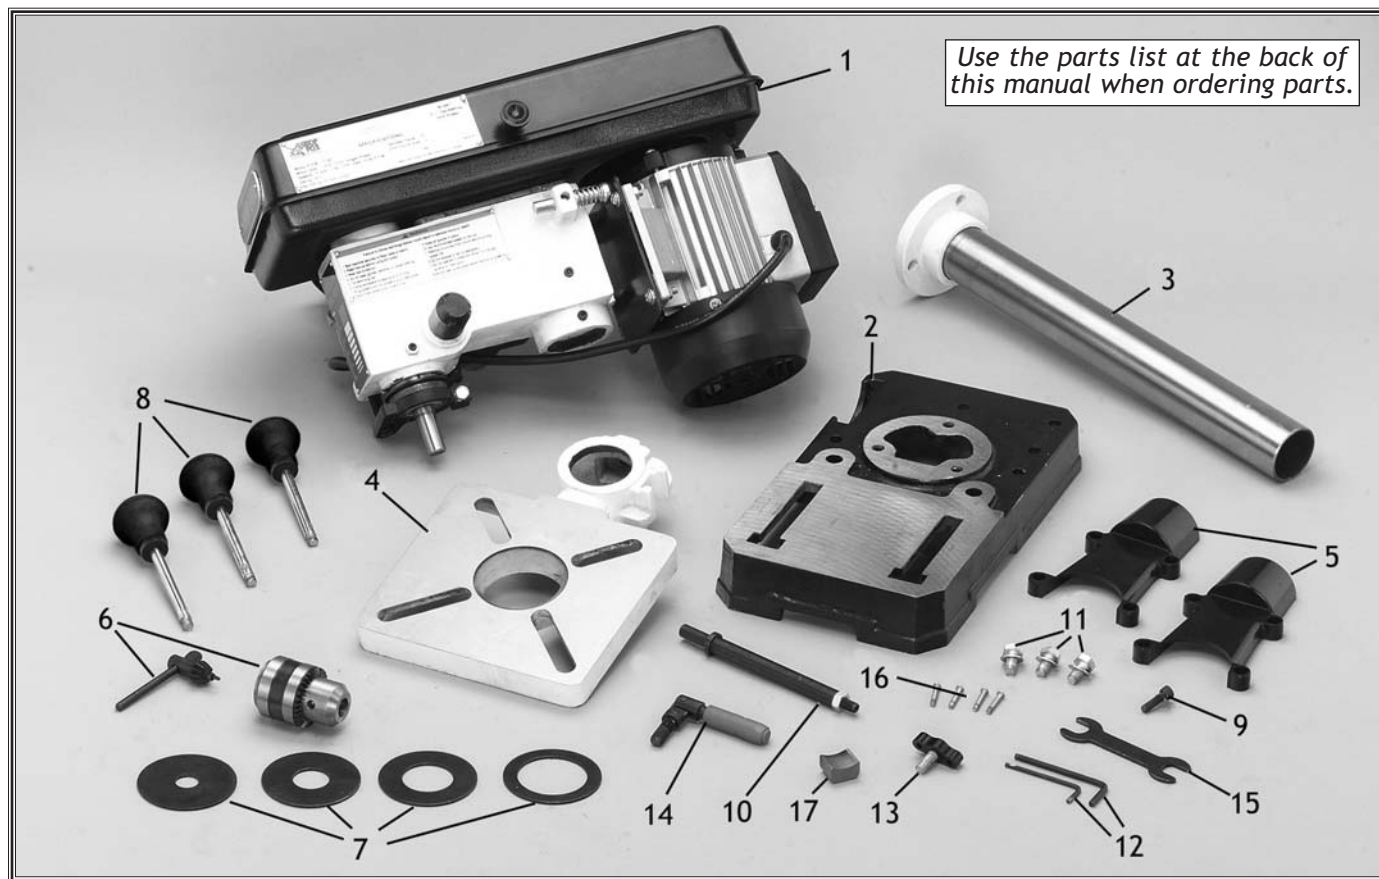


Figure 6. Components laid out for identification.

- | | | |
|------------------------|--------------------------|------------------------------|
| 1. Headstock | 7. Table Inserts (4) | 13. Belt Tension Knob |
| 2. Base | 8. Spindle Handles (3) | 14. Table Lock Knob |
| 3. Column | 9. Cap Screw and Washers | 15. Open End Wrench |
| 4. Table | 10. Sanding Spindle | 16. Phillips Head Screws (4) |
| 5. Dust Port | 11. Hex Head Bolts (3) | 17. Lock Shoe |
| 6. Drill Chuck and Key | 12. Hex Wrenches (2) | |

Base and Column

The base and column must be securely mounted, so if drilling an odd-shaped workpiece the machine will not fall over.

To install the base and column, do these steps:

1. Position the drill press base on a flat and stable surface.
2. Using two clamps, clamp the base to the mounting surface.
3. Use the holes provided in the bottom of the base as a drill guide, and drill holes in the mounting surface. See **Figure 7**.
4. Secure the base using $\frac{5}{16}$ " lag bolts or supplied through bolts with washers and nuts.
5. Place the column on the base, line up the 3 mounting holes, and secure tightly with the three M8-1.25 x 16mm hex head bolts using the open-end wrench provided.



Figure 7. Using holes as a drill guide.



Figure 8. Installing the dust port.

Dust Port

The dust port directs suction to the sanding sleeve, removing hazardous dust and increasing abrasive life.

To install the dust port, do these steps:

1. Position the two-piece dust port to the bottom of the table. See **Figure 8**.
2. Insert the four M4-0.7 x 22mm Phillips head screws and tighten.

Table

When installed correctly, the table should lock in position with firm lever torque.

To install the table, do these steps:

1. Thread the table lock handle 3 turns into the table support bracket.
2. Insert the lock shoe into the pocket located inside the hole of the table support bracket. See **Figure 9**.
3. Slide the table support bracket onto the column until the table support bracket is near the bottom of the column.
4. Tighten the table lock handle to lock the table in position.


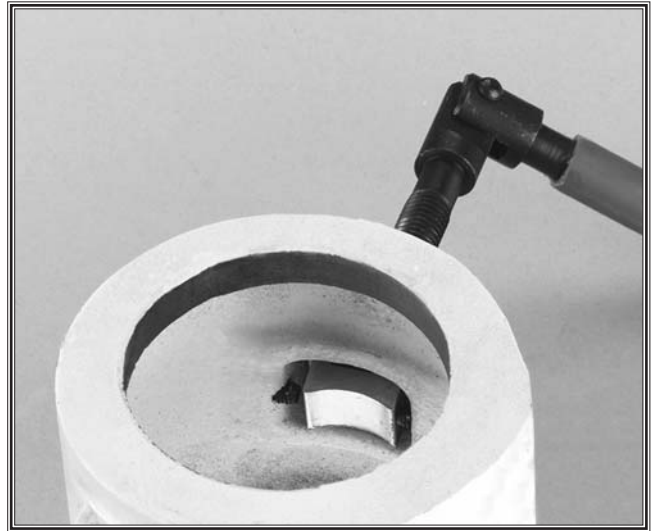


Figure 9. Loosely installing table lock lever.

Headstock

The headstock must be tightened in position with the setscrew so the headstock is aligned with the drill press base for balance and weight distribution. **DO NOT** over tighten the set screw and strip the threads or bend the column.

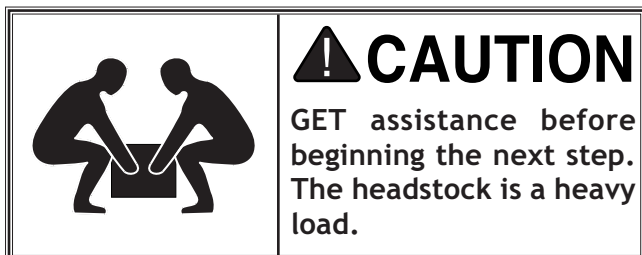

To install the headstock, do these steps:

1. With an assistant, position the pocket over the column and allow the headstock to slide down until the column fully seats up and into the headstock (approximately 2"). See **Figure 10**.
2. Align the headstock directly over the foot of the base as viewed from the front of the drill press.
3. Tighten the two setscrews to secure the headstock to the column. See **Figure 11**.



Figure 10. Aligning the pocket in the headstock with the column.



Figure 11. Securing the headstock to the column.

Drill Chuck

The drill chuck is seated to the spindle with a JT-33 tapered surface and a screw.

To install the drill chuck, do these steps:

1. Clean the drill chuck and spindle with mineral spirits and follow all safety warnings on the container. Failure to clean the tapered-mating surfaces of the spindle and drill chuck will result in the chuck falling off during use.
2. Use the provided chuck key to adjust the jaws of the chuck until they are well inside the drill chuck body. See Figure 12.

NOTICE

DO NOT use a hammer to seat the drill chuck onto the spindle. You will damage the oscillating mechanism.

3. Place the drill chuck on the spindle, and insert the cap screw into the hole of the drill chuck. See Figure 13.
4. Tighten the cap screw so the drill chuck is seated securely on the spindle.
 - If the chuck fails to remain secure on the spindle, repeat Step 1, DO NOT use a hammer to seat the drill chuck onto the spindle!

Handles

Three handles are supplied for drilling operations. **NOTE:** remove these handles when you use the oscillating feature.

To install the handles, do these steps:

1. Thread the handles into the hub as shown in Figure 14.
2. Tighten the handles until they are snug, DO NOT over-tighten.



Figure 12. Jaws adjusted inside chuck body.

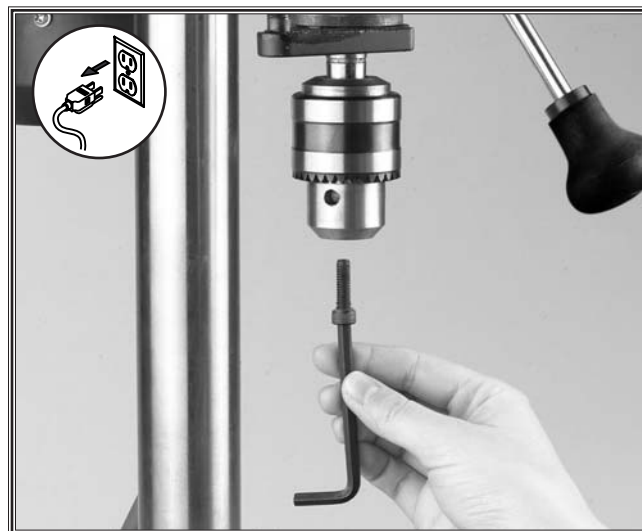


Figure 13. Inserting the caps crew.

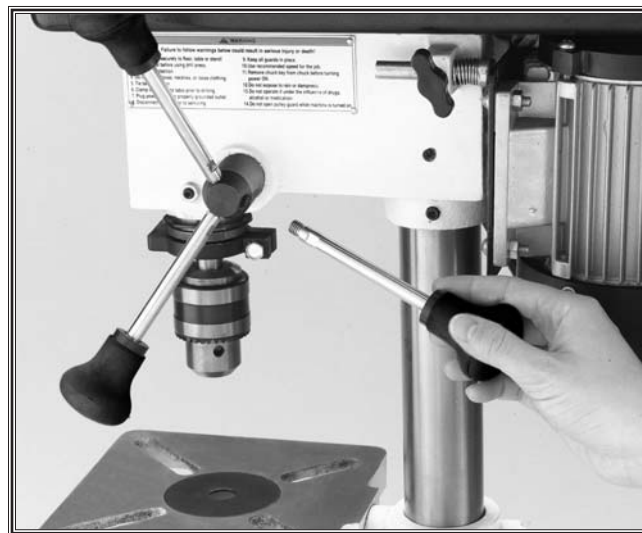


Figure 14. Installing spindle handles.


ADJUSTMENTS

Belt Tension

The drill press drive belt lasts a long time; however, during its life the belt may stretch slightly, which can cause the pulleys to slip under a load. You will then need to adjust the drive belt tension.

NOTICE

The oscillator belt is not adjustable. If the belt shows cracks or is slipping, replace the belt with a new one.



⚠ WARNING

MAKE SURE your machine is unplugged during all assembly, adjustments, or maintenance procedures. Otherwise serious personal injury may occur!

To adjust the drive belt tension, do these steps:

1. **UNPLUG THE DRILL PRESS!**
2. Open the belt cover. See **Figure 15**.
3. Loosen the motor lock screw at the side of the headstock. See **Figure 16**.
4. Gently pivot the motor away from the pushrod rubber until the belt is taut.
5. Hold the motor in position so the rubber pad is held against the motor.
6. Tighten the lock screw, and make sure the belt deflection gap is correct when pinched together between the pulleys. See **Figure 17**.
 - If the gap between both inner sides of the belt is greater or less than $1\frac{1}{2}$ " repeat **Steps 3** through **6** until the deflection gap is $1\frac{1}{2}$ ".
 - If the deflection gap is $1\frac{1}{2}$ ", close the belt cover until it snaps shut. **The motor will not start until the cover is closed.**

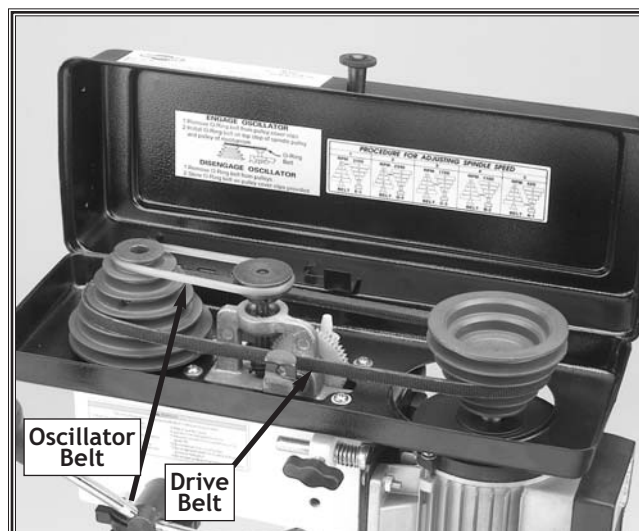


Figure 15. Belt drive system.

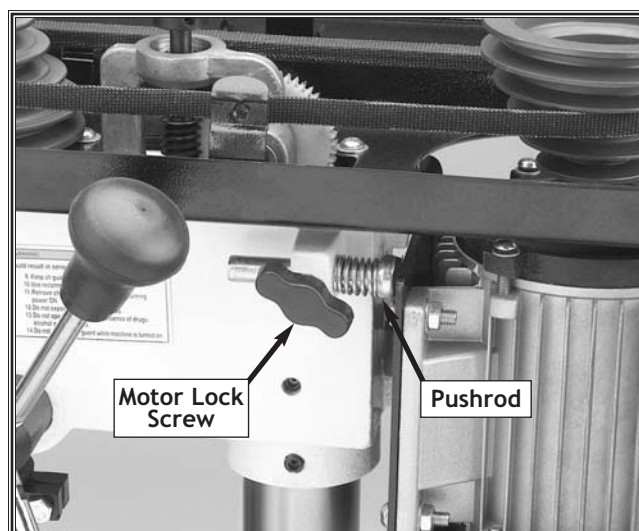


Figure 16. Motor lock screw.


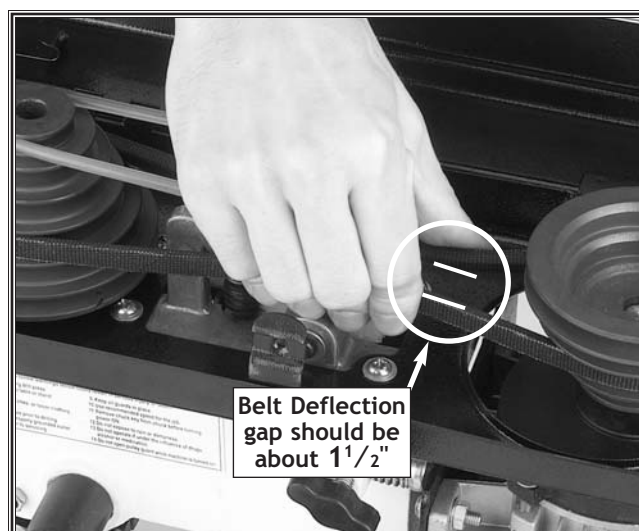


Figure 17. Measuring belt deflection.

Feed Shaft Spring Tension

The feed shaft return spring is adjusted at the factory; however, during the life of the drill press you may want to adjust the feed shaft return spring at a stronger return pressure.

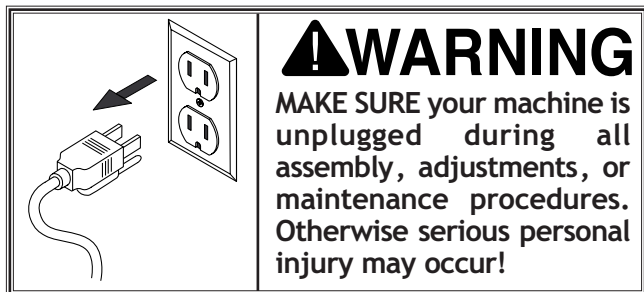

To adjust the feed shaft spring tension, do these steps:

1. UNPLUG THE DRILL PRESS!
2. Wipe off any oil on the spring lock cover so it will not slip in your fingers when you hold the cover from spinning. See Figure 18.
3. Make sure the quill shaft is completely seated and the depth stop reads "0". See Figure 19.
4. Put on thick leather gloves and hold the spring cover against the side of the head-stock so the cover stays splined with the locking lug; remove the jam nut and loosen the cover nut approximately $\frac{1}{4}$ " (6.4mm). See Figure 19.
5. Pull the cover outward just enough to disengage the spring-cover lock slot from the locking lug. See Figure 20.
6. Rotate the cover counter clockwise to increase spring tension, or let the cover slowly unwind in the clockwise direction to reduce spring tension. See Figure 20.

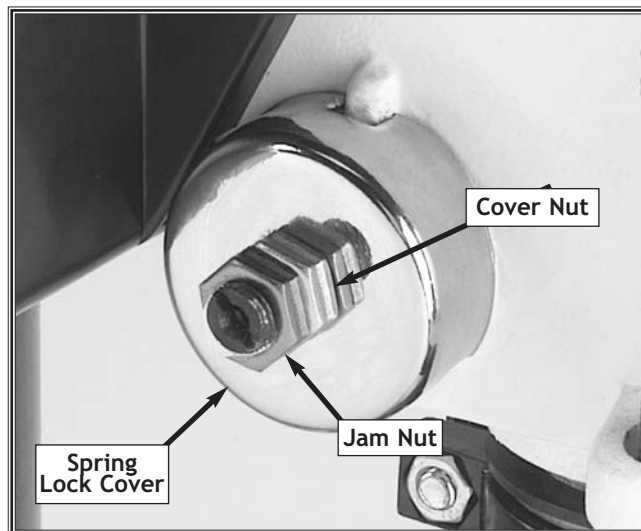


Figure 18. Feed shaft return spring assembly.

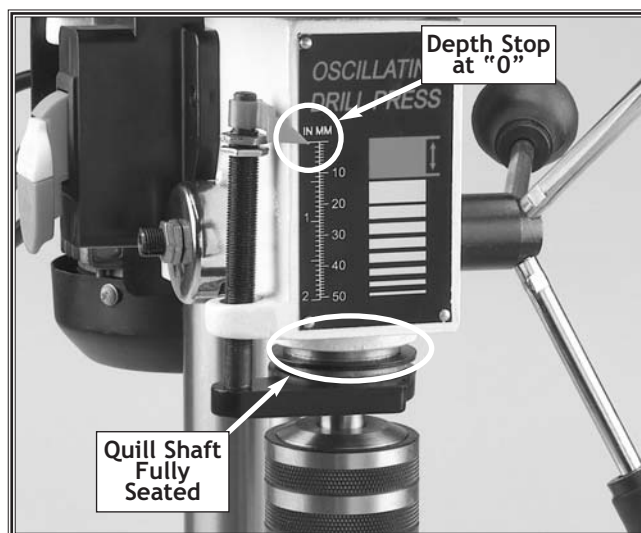


Figure 19. Quill shaft fully seated.


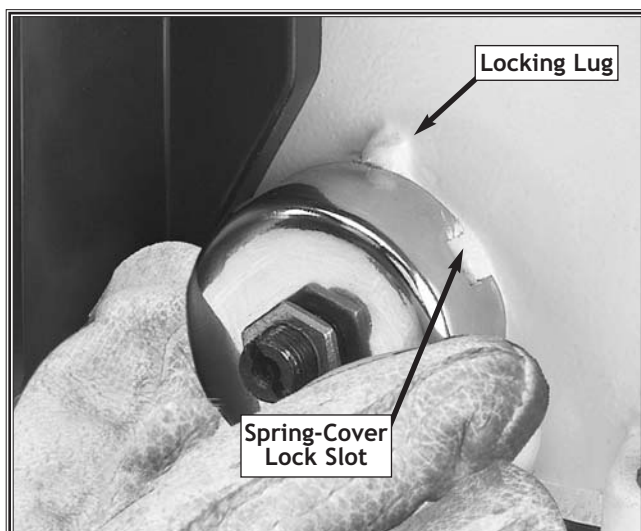


Figure 20. Typical spring cover lock slot and locking lug.

7. Engage the next available spring-cover lock slot with the locking lug, and hold the spring lock cover tightly against the side of the headstock. See **Figure 21**.
8. Snug the cover nut against the spring cover just until the nut stops, and then back-off the nut approximately $\frac{1}{3}$ turn, or just enough so there is no binding anywhere along complete spindle travel.
9. Hold the cover nut and tighten the jam nut against the cover nut. See **Figure 21**.

Quill-Shaft Screw

While you may never have to adjust the quill-shaft screw, you should understand its function and know how to adjust it should you ever need to remove the quill for cleaning. This screw prevents the quill from rotating during drilling and sanding procedures, and if adjusted incorrectly, the quill may have lash or bind.

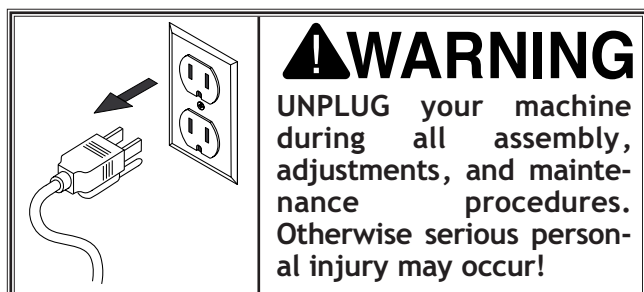

To adjust the quill-shaft screw, do these steps:

1. Unplug the drill press.
2. Clean and lubricate the quill shaft with a thin coat of light oil, and make sure the quill travels freely. See **Figure 22**.
3. Loosen the jam nut. See **Figure 23**.
4. Turn the quill-shaft screw clockwise or counterclockwise to establish free, unbinding travel while moving the quill up and down through its entire range of travel.
5. When the quill-shaft screw is screwed inward against the quill as far as the screw can go without binding the quill, hold the screw and tighten the jam nut.
6. Recheck for quill binding and looseness while moving the quill up and down through its entire range of travel and re-adjust as required.



Figure 21. Hold the spring cover tightly.



Figure 22. Clean and oil quill shaft.

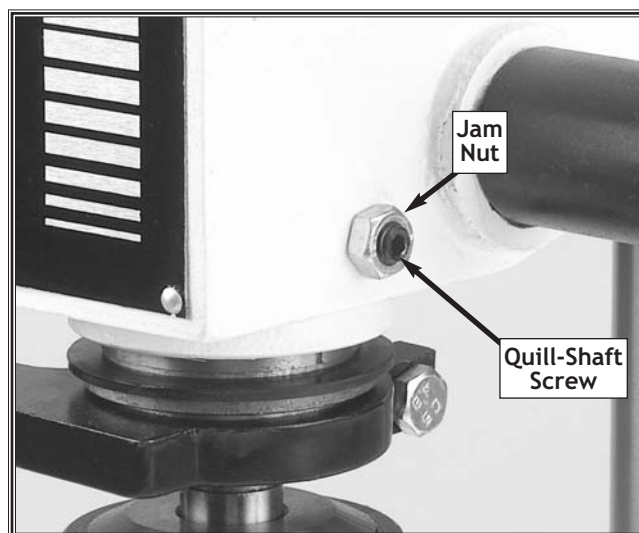


Figure 23. Typical quill-shaft screw and jam nut.

Table Height / Tilt

You can adjust the table height and angle to accommodate for workpiece height or achieve special drilling/sanding angles. You can also move the table out of the way and use the drill press base as a table for drilling/sanding.



CAUTION

SUPPORT table before loosening lock knob. The weight of the table combined with the workpiece could result in a crushing injury.

To adjust the table, do these steps:

1. Hold onto the table with one hand and loosen the table lock knob. See Figure 24.
2. Lift or lower the table to the desired height, and then position the table so the opening in the installed table insert is centered to the drill bit or sanding drum.
 - If the table is not needed, pivot the table to the back side of the column so you can support the workpiece on the base (drilling operations only). See Figure 25.
3. Tighten the table lock knob.
4. Loosen the table tilt lock bolt and use the tilt scale to find your desired drilling or sanding angle. See Figure 26.
5. Tighten the tilt table lock bolt.



Figure 24. Support table while loosening lock.



Figure 25. Table adjusted behind column.


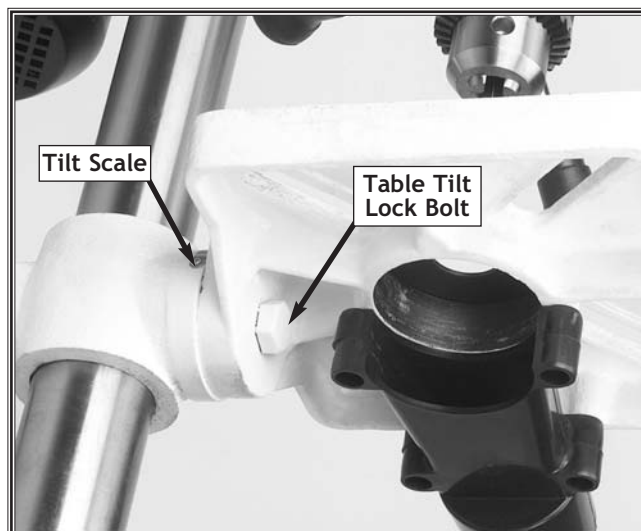


Figure 26. Table tilt lock bolt.

Drilling Speed

The Model W1667 8 1/2" Oscillating Drill Press has 5 speeds ranging from 620 to 3100 RPM. Refer to the speed charts located under the belt guard while following the instructions below.

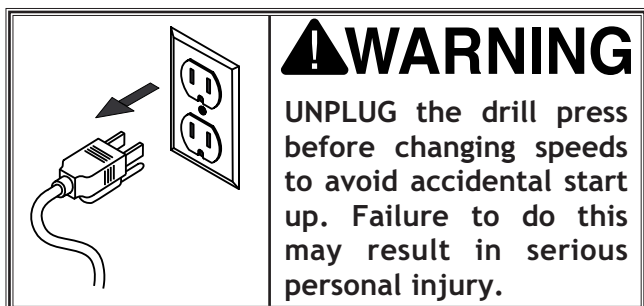

To change the drilling speed, do these steps:

1. **UNPLUG THE DRILL PRESS!**
2. Refer to the speed chart located under the belt cover or refer to the "Drill Press RPM Chart" on Page 18 and choose the desired speed.
3. Loosen the v-belt tension lock. See Figure 27.
4. Pull the motor toward the front of the drill press to remove tension from the V-belt.
5. Move the V-belt to the desired V-grooves on the motor and spindle pulleys. See Figure 28.
6. Push the motor toward the back of the headstock, the motor pushrod rod is spring loaded and will follow the motor. See Figure 29.
7. Tighten the lock knob.
8. Tighten the lock screw, and make sure the belt deflection is 1 1/2" between both inner sides when the belt is pinched together between the pulleys. Refer to "Belt Tension" in the ADJUSTMENTS section on Page 13 for details.
9. Close the cover. The motor will not start until the cover is closed.



Figure 27. Loosening the lock knob.



Figure 28. Adjusting belt to desired speed.

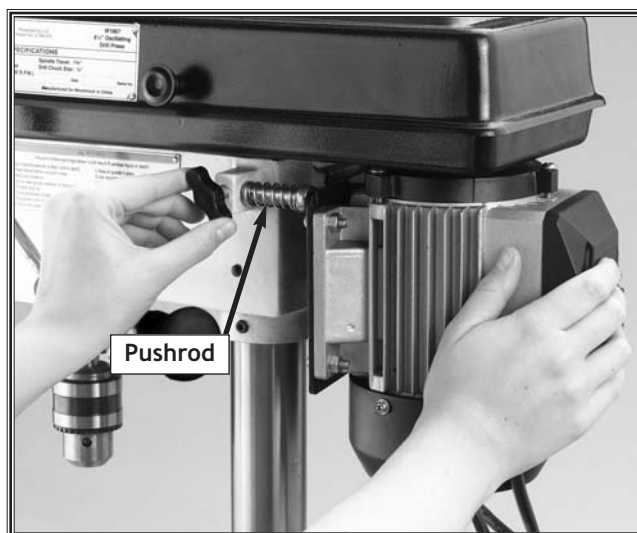


Figure 29. Motor support rod follows motor.

Drill Press RPM Chart

Use **Figure 30** to select the optimum motor-to-spindle pulley ratio for drilling, cutting, and sanding operations. Refer to the **Drill, Cutter, and Saw RPM Chart** on **Page 19** for suggested tool RPMs.

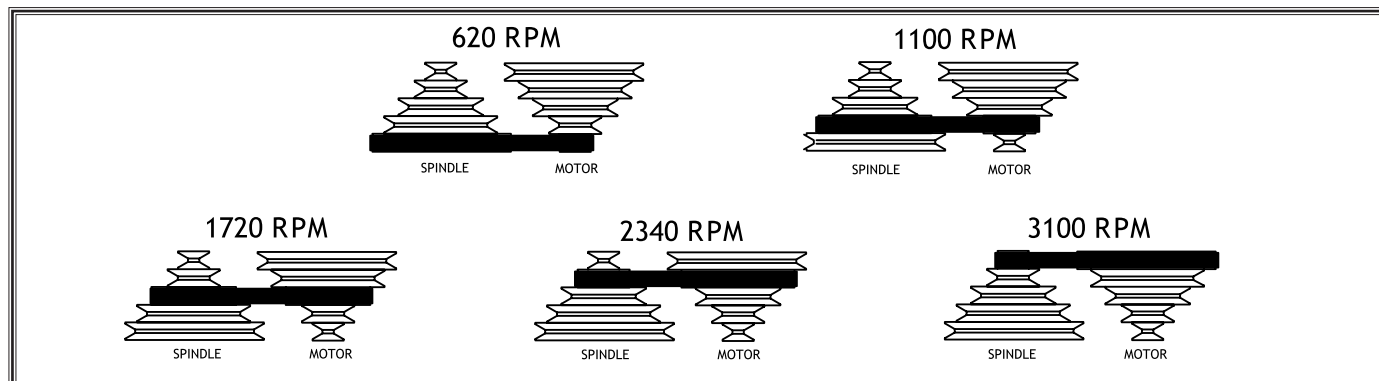


Figure 30. Drill Press RPM Chart.

Drilling Depth

Your new drill press comes fitted with a depth stop that allows drilling holes at a preset depth.

NOTICE

BACK-OFF the depth stop completely and secure the stop nuts before using the oscillating feature. If the depth stop is left adjusted for a shallow hole, or the nuts rattle down to the stop while in operation, the depth stop will bottom out and break the oscillator.

To adjust the drilling depth, do these steps:

1. **UNPLUG THE DRILL PRESS!**
2. Rotate the oscillator pulley until the depth stop pointer indicates "0". See **Figure 30**.
3. Loosen the jam nut on the depth stop rod.
4. Move the spindle down while watching the pointer-to-scale relationship and stop at the desired depth.
5. Turn the lower nut while maintaining this depth until the nut comes into contact with the stop flange. See **Figure 31**.
6. Allow the spindle to return to its original position and tighten the jam nut against the stop nut while making sure the stop nut does not move.
7. Drill a test hole into scrap stock before drilling into any workpiece, and readjust depth stop if necessary.

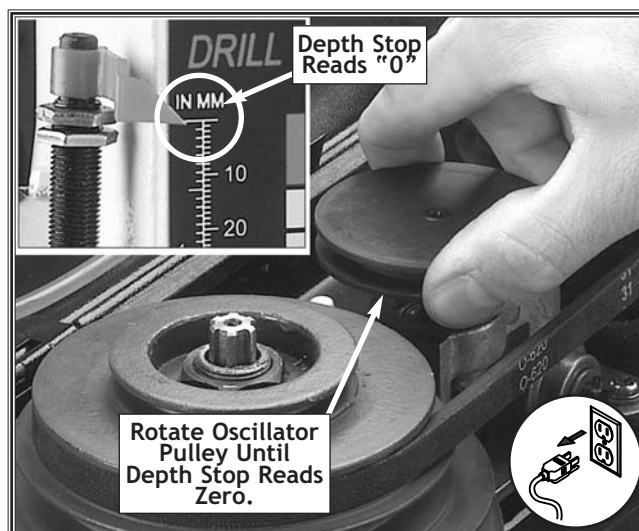


Figure 30. Retracting the oscillator for drilling.

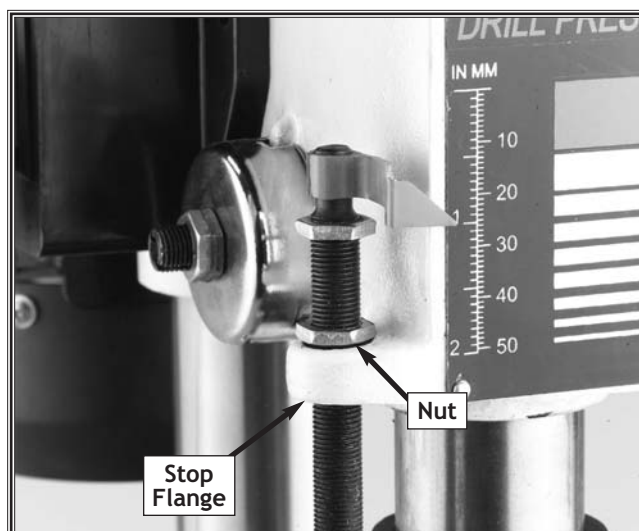


Figure 31. Nut contacting stop flange.

Drill, Cutter, and Hole Saw Suggested RPM Chart

ALWAYS follow the drill, saw, or cutter manufacturer's recommended RPM specifications. **ALWAYS** wear safety glasses. **DO NOT** use your drill press to exceed the drilling, cutting, or sawing RPM or the feed rate of your bit or cutter. Otherwise serious personal injury can occur.

The RPMs listed below are merely suggestions to help you use your drill press in the event that you cannot find a basic starting RPM point. The final RPMs may differ based on the material drilled, the pressure you apply, and the cut-quality needed. Remember, even if the RPM and all other settings are correct, cooling the tool with a lubricant and drilling a pilot hole may also be required. Refer to **WARNINGS** and **TIPS**, trade journals, training manuals, and other educational resources for in-depth instructions and safety knowledge.

For current product line, refer to: <http://www.steelix.biz/drilling.cfm>.

| Sanding Sleeves or Grinding Bits | Soft Wood | Hard Wood | Plastic | Brass | Aluminum | Mild Steel |
|---|-----------|-----------|---------|-------|----------|------------|
| 1", 1-1/2", 2" | 2000 | 1725 | 1000 | 3100 | 3100 | 3100 |
| Twist Type Drill Bits: (Wood, Plastic, and Metal) | | | | | | |
| 1/16" to 3/16" | 3000 | 3000 | 2500 | 3000 | 3000 | 3000 |
| 1/4" to 3/8" | 3000 | 1500 | 2000 | 1200 | 2500 | 1000 |
| 7/16" to 5/8" | 1500 | 750 | 1500 | 750 | 1500 | 600 |
| 11/16" to 1" | 750 | 500 | - | 400 | 1000 | 350 |
| Spade Drill Bits: (Wood) | | | | | | |
| 1/4" to 1/2" | 2000 | 1500 | - | - | - | - |
| 5/8" to 1" | 1750 | 1500 | - | - | - | - |
| 1-1/8" to 1-1/2" | 1500 | 1000 | - | - | - | - |
| Spade with Spur Drill Bits: (Wood and Plastic) | | | | | | |
| 3/8" to 1" | 2000 | 1800 | 500 | - | - | - |
| Brad Point Drill Bits: (Wood and Plastic) | | | | | | |
| 1/8" | 1800 | 1200 | 1500 | - | - | - |
| 1/4" | 1800 | 1000 | 1500 | - | - | - |
| 3/8" | 1800 | 750 | 1500 | - | - | - |
| 1/2" | 1800 | 750 | 1000 | - | - | - |
| 5/8" | 1800 | 500 | 750 | - | - | - |
| 3/4" | 1400 | 250 | 750 | - | - | - |
| 7/8" | 1200 | 250 | 500 | - | - | - |
| 1" | 1000 | 250 | 250 | - | - | - |
| Forstner Drill Bits: (Wood and Plastic) | | | | | | |
| 1/4" to 11/16" | 2400 | 1600 | 250 | - | - | - |
| 3/4" to 1-1/16" | 1800 | 1200 | 250 | - | - | - |
| 1-1/8" to 1-7/16" | 1200 | 800 | 250 | - | - | - |
| 1-1/2" to 2-1/8" | 600 | 450 | - | - | - | - |
| 2-1/4" to 3-1/8" | 480 | 250 | - | - | - | - |
| Multi-Spur Drill Bits: (Wood) | | | | | | |
| 2-1/8" to 4" | 250 | 250 | - | - | - | - |
| Countersink Cutters: (Wood, Plastic, and Metal) | | | | | | |
| 2-Flute Cutter | 1400 | 1400 | - | - | - | - |
| 5-Flute Cutter | 1000 | 750 | 750 | 250 | 250 | 250 |
| Plug Cutters: (Wood) | | | | | | |
| 3/8" to 1/2" | 1200 | 1000 | - | - | - | - |
| 5/8" to 1" | 800 | 600 | - | - | - | - |
| Carbide Rosette Cutters: One-Piece Shear Type (Wood) | | | | | | |
| 2-1/2" to 3" | 1800 | 500 | - | - | - | - |
| Rosette Cutters: Replaceable Carbide-Knife Type (Wood) | | | | | | |
| 2-1/4" to 3-1/8" | 350 | 250 | - | - | - | - |

WARNINGS and TIPS

- **WARNING:** The larger the drill bit or hole saw and the slower the RPM, the greater the chance the tool could aggressively grab the workpiece, damage the tool and workpiece and cause injury. High RPMs can melt plastic, burn wood, and dull the tool.
- **WARNING:** Use a 5-Flute cutter when cutting into plastics, brass, aluminum, and mild steel. A 2-Flute cutter can aggressively grab the workpiece and damage the tool.
- **TIP:** To increase the life of drill bits, cutters, hole saws, and improve cut quality, use a lubricant equivalent to these:
 - Plastics:** use a soapy-water lubricant
 - Brass:** use a water-based lubricant
 - Mild Steel:** use an oil-based lubricant
 - Aluminum:** use a paraffin-based lubricant
 - Cast Iron:** use a pipe-thread cutting lubricant
 - Wood:** use no lubricant.
- **TIP:** Raise the drill bit, cutter, or hole saw often to clear chips and cool the tool.
- **TIP:** When drilling plastics with spade bits, use a spade bit with spurs.
- **TIP:** Plug cutters and rosette cutters are for wood only; however, carbide-tipped bits and cutters cut at a higher RPM, and can cut materials other than wood depending on cutter type. Carbide makes better cuts and lasts longer than HSS steel.
- **TIP:** When using hole saws, apply firm and even pressure, so the saw teeth contact the surface all at the same time-not at an angle. You can also flip the workpiece and finish drilling from the other side.
- **TIP:** To prevent drill bit wandering, use a center punch to start the drill bit.


Saws: Bi-Metal Hole Saws (Most Materials)

| Hole Saw Diameter | Soft Wood | Hard Wood | Plastic | Mild Steel | Cast Iron | Brass | Aluminum | Hole Saw Diameter | Soft Wood | Hard Wood | Plastic | Mild Steel | Cast Iron | Brass | Aluminum |
|-------------------|-----------|-----------|---------|------------|-----------|-------|----------|-------------------|-----------|-----------|---------|------------|-----------|-------|----------|
| 9/16" | 1150 | 870 | 1320 | 580 | 400 | 790 | 900 | 2-7/8" | 240 | 180 | 275 | 120 | 80 | 160 | 180 |
| 5/8" | 1100 | 825 | 1250 | 550 | 365 | 730 | 825 | 3" | 230 | 170 | 260 | 115 | 75 | 150 | 170 |
| 11/16" | 1000 | 750 | 1140 | 500 | 330 | 665 | 750 | 3-1/16" | 220 | 165 | 250 | 110 | 75 | 150 | 170 |
| 3/4" | 920 | 690 | 1050 | 460 | 300 | 600 | 690 | 3-1/8" | 220 | 165 | 250 | 110 | 70 | 140 | 165 |
| 13/16" | 850 | 635 | 970 | 425 | 280 | 560 | 635 | 3-3/16" | 210 | 155 | 240 | 105 | 70 | 140 | 165 |
| 7/8" | 780 | 585 | 890 | 390 | 260 | 520 | 585 | 3-1/4" | 210 | 155 | 240 | 105 | 70 | 140 | 155 |
| 15/16" | 740 | 555 | 845 | 370 | 245 | 495 | 555 | 3-5/16" | 200 | 150 | 225 | 100 | 70 | 130 | 155 |
| 1" | 700 | 525 | 800 | 350 | 235 | 470 | 525 | 3-3/8" | 200 | 150 | 225 | 100 | 65 | 130 | 150 |
| 1-1/16" | 650 | 480 | 740 | 325 | 215 | 435 | 480 | 3-7/16" | 200 | 150 | 225 | 100 | 65 | 130 | 150 |
| 1-1/8" | 600 | 450 | 685 | 300 | 200 | 400 | 450 | 3-1/2" | 190 | 140 | 215 | 95 | 65 | 130 | 145 |
| 1-3/16" | 570 | 430 | 650 | 285 | 190 | 380 | 425 | 3-9/16" | 190 | 140 | 215 | 95 | 65 | 120 | 145 |
| 1-1/4" | 550 | 410 | 625 | 275 | 180 | 360 | 410 | 3-5/8" | 190 | 140 | 215 | 95 | 60 | 120 | 140 |
| 1-5/16" | 520 | 390 | 595 | 260 | 175 | 345 | 390 | 3-11/16" | 180 | 135 | 205 | 90 | 60 | 120 | 140 |
| 1-3/8" | 500 | 375 | 570 | 250 | 165 | 330 | 375 | 3-3/4" | 180 | 135 | 205 | 90 | 60 | 120 | 135 |
| 1-7/16" | 480 | 360 | 545 | 240 | 160 | 315 | 360 | 3-13/16" | 180 | 135 | 205 | 90 | 60 | 120 | 135 |
| 1-1/2" | 460 | 345 | 525 | 230 | 150 | 300 | 345 | 3-7/8" | 180 | 135 | 205 | 90 | 60 | 120 | 135 |
| 1-9/16" | 440 | 330 | 500 | 220 | 145 | 290 | 330 | 4" | 170 | 130 | 195 | 85 | 55 | 110 | 130 |
| 1-5/8" | 420 | 315 | 475 | 210 | 140 | 280 | 315 | 4-1/16" | 170 | 130 | 195 | 85 | 55 | 110 | 120 |
| 1-11/16" | 410 | 310 | 465 | 205 | 130 | 260 | 295 | 4-1/8" | 160 | 120 | 180 | 80 | 55 | 110 | 120 |
| 1-3/4" | 390 | 290 | 445 | 195 | 130 | 260 | 295 | 4-3/16" | 160 | 120 | 180 | 80 | 55 | 110 | 120 |
| 1-13/16" | 380 | 285 | 435 | 190 | 125 | 250 | 285 | 4-1/4" | 160 | 120 | 180 | 80 | 55 | 100 | 120 |
| 1-7/8" | 360 | 270 | 400 | 180 | 120 | 240 | 270 | 4-5/16" | 160 | 120 | 180 | 80 | 55 | 100 | 120 |
| 2" | 340 | 255 | 385 | 170 | 115 | 230 | 255 | 4-3/8" | 160 | 120 | 180 | 80 | 50 | 100 | 120 |
| 2-1/16" | 330 | 245 | 375 | 165 | 110 | 220 | 245 | 4-7/16" | 150 | 110 | 170 | 75 | 50 | 100 | 105 |
| 2-1/8" | 320 | 240 | 365 | 160 | 105 | 210 | 240 | 4-1/2" | 150 | 110 | 170 | 75 | 50 | 100 | 105 |
| 2-3/16" | 310 | 230 | 355 | 155 | 105 | 205 | 240 | 4-9/16" | 150 | 110 | 170 | 75 | 50 | 95 | 100 |
| 2-1/4" | 300 | 225 | 340 | 150 | 100 | 200 | 225 | 4-5/8" | 150 | 110 | 170 | 75 | 50 | 95 | 100 |
| 2-5/16" | 290 | 215 | 330 | 145 | 100 | 195 | 225 | 4-11/16" | 150 | 110 | 170 | 75 | 50 | 95 | 100 |
| 2-3/8" | 280 | 210 | 320 | 140 | 95 | 190 | 220 | 4-3/4" | 150 | 110 | 170 | 75 | 50 | 95 | 95 |
| 2-7/16" | 280 | 210 | 320 | 140 | 95 | 185 | 210 | 4-13/16" | 130 | 100 | 150 | 65 | 45 | 90 | 95 |
| 2-1/2" | 270 | 200 | 310 | 135 | 90 | 180 | 205 | 4-7/8" | 130 | 100 | 150 | 65 | 45 | 90 | 90 |
| 2-9/16" | 270 | 200 | 310 | 135 | 85 | 175 | 200 | 5" | 130 | 100 | 150 | 65 | 45 | 90 | 90 |
| 2-5/8" | 260 | 195 | 295 | 130 | 85 | 170 | 195 | 5-1/4" | 120 | 90 | 135 | 60 | 40 | 85 | 85 |
| 2-11/16" | 260 | 195 | 295 | 130 | 85 | 165 | 190 | 5-1/2" | 120 | 90 | 135 | 60 | 40 | 85 | 85 |
| 2-3/4" | 250 | 185 | 285 | 125 | 80 | 160 | 185 | 5-3/4" | 110 | 80 | 125 | 55 | 35 | 75 | 75 |
| 2-13/16" | 250 | 185 | 285 | 125 | 80 | 160 | 185 | 6" | 110 | 80 | 125 | 55 | 35 | 75 | 75 |

OPERATIONS

Starting the Drill Press

Once assembly is complete and adjustments are done to your satisfaction, you are ready to start the drill press. Every time you start the drill press, you should follow these basic instructions.

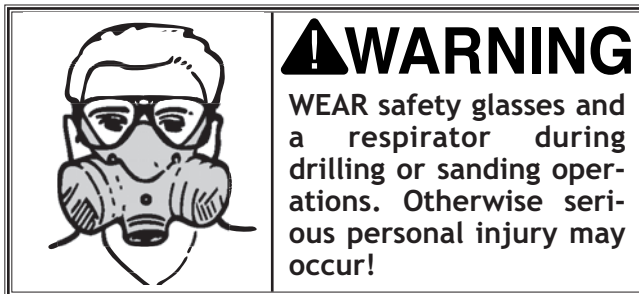


To start the drill press, do these steps:

1. Make sure the starting switch paddle is down for **OFF**.
2. Make sure all fasteners and lock handles are tight.
3. Make sure the drill chuck key is removed.
4. Plug in the power cord.
5. Lift the **ON/OFF** switch to start the drill press, and make sure that your finger is poised over the paddle, as shown in **Figure 32**, just in case there is a problem.
6. Listen and observe the drill press, it should run smoothly, with little or no vibration or rubbing noises.
 - If you hear strange or unusual noises, shut the drill press **OFF**, and wait for the spindle to stop moving.
7. Unplug the drill press and refer to the “**Troubleshooting**” table on **Page 26** to help isolate and correct the problem before using the drill press again.



Figure 32. Hand poised over a typical stop switch.

Drill/Drum Changes

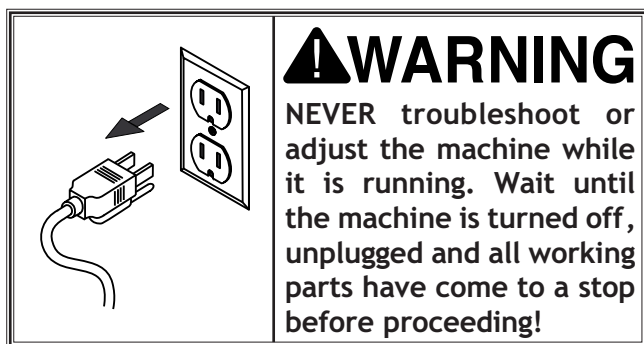

To change drill bits and sanding drums, do these steps:

1. **UNPLUG THE DRILL PRESS!**
2. Use the chuck key to open the chuck wide enough to accept the new bit or the sanding drum mandrel. See Figure 33.
3. Install the bit or mandrel so the chuck jaws will grab as much of the bit or mandrel shank as it can.
 - If you are installing a small drill bit, make sure it is held between three jaws instead of only two, and NEVER allow a chuck to grab the fluted body of drill bits.
 - If you are installing the sanding drum, install the paper and drum before installing the spindle into the drill chuck (contact your local **SHOP FOX®** dealer for drums and paper).
4. Tighten the chuck with the chuck key, using any of the three key end locations. See Figure 34.
5. Choose the insert that has an opening approximately $\frac{1}{4}$ " bigger than the sanding drum chosen. For drilling, always use the table insert with the smallest opening. A table insert is not needed when a 2" drum is used. See Figure 35.
6. Install the chosen table insert into the pocket in the top of the table.
7. Remove the chuck key and reconnect the power source.
8. Reverse these steps to remove the drill bit or sanding drum.



Figure 33. Installing bit.

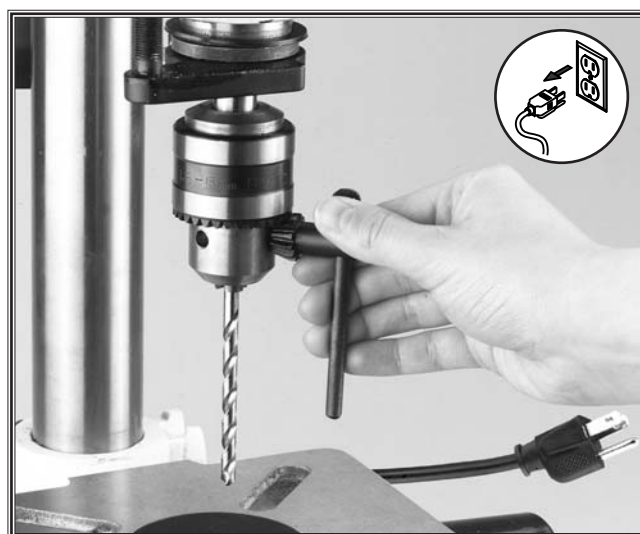



Figure 34. Chuck key engaged.



Figure 35. Sanding drum table insert.

Using the Oscillator

One of the great features of the Model W1667 8 1/2" Oscillating Drill Press is its sanding capability. The drill press can be converted from drilling operations to sanding operations in just a few steps.

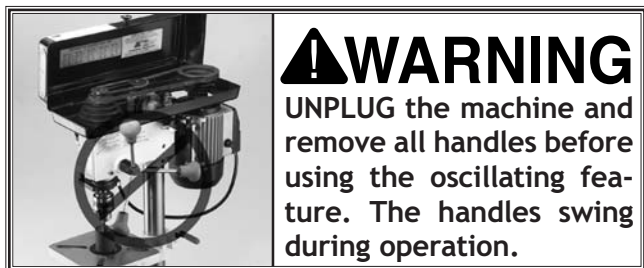

To use the oscillating feature, do these steps:

1. UNPLUG THE DRILL PRESS!
2. Remove the spindle handles.
3. Lift the belt cover and remove the round belt located on the storage bracket under the speed chart. See Figure 36.
4. Stretch the belt onto the top groove in the spindle and oscillating pulley. See Figure 37.
5. Close the cover. The motor will not start until the cover is closed.
6. Loosen the jam nut for the depth stop and adjust both nuts until they are positioned at the top of the depth stop rod. Tighten the jam nut. See Figure 38.

NOTICE

ALWAYS back-off the depth stop completely and secure the depth stop nuts before using the oscillating feature. If the depth stop is left adjusted for a shallow hole, or the nuts rattle down to the stop while in operation, the depth stop will bottom out and break the oscillator.

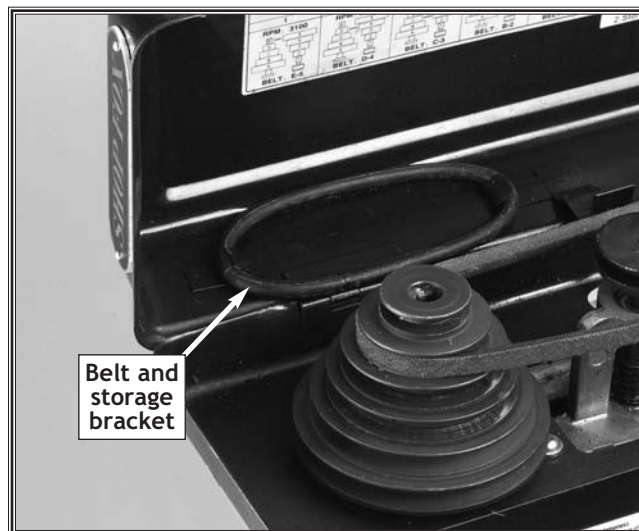


Figure 36. Oscillator belt on storage bracket.



Figure 37. Stretch the belt to fit on pulleys.



Figure 38. Back-off the depth stop nuts.

7. Choose the insert that has an opening which is slightly bigger than the sanding drum chosen. See **Figure 39**.
8. Insert the sanding drum mandrel into the chuck and set the chosen table insert into the pocket in the top of the table. See **Figure 40**.
 - For general drill bits, small reamers, and miscellaneous small cutting and sanding bits, use the $\frac{5}{8}$ " and the 1" table inserts.
 - For the 1" sanding drum, use the $1\frac{3}{8}$ " table insert.
 - For the $1\frac{1}{2}$ " sanding drum, use the $1\frac{7}{8}$ " table insert.
 - For the 2" sanding drum, use no table insert.
9. Loosen and pivot the table so the opening in the installed table insert is centered to the drill bit or sanding drum.

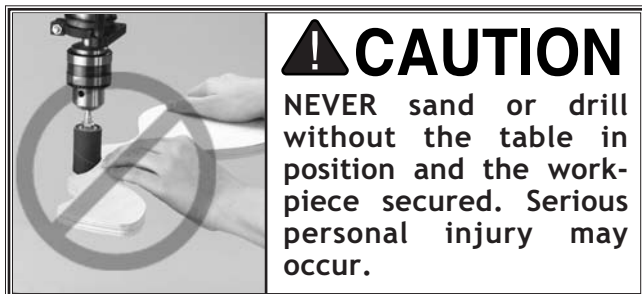


Figure 39. Sanding drum table insert.

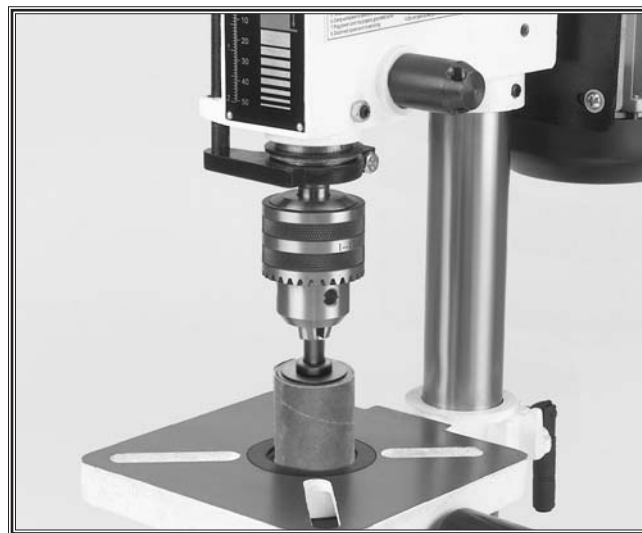



Figure 40. Sanding drum installed.

10. Adjust the table height to use all of the grit on the paper as the paper wears.
 - If the thickness of the workpiece does not allow much table movement and the sanding drum paper is partially worn on one end, remove the drum from the sanding spindle, turn it end for end and replace it on the sanding spindle to use the newer part of the sandpaper.
11. Turn the drill press **ON**, and begin sanding.

MAINTENANCE

General

Periodic maintenance on your Model W1667 8 1/2" Oscillating Drill Press will ensure its optimum performance. Make a habit of inspecting your drill press after each use.

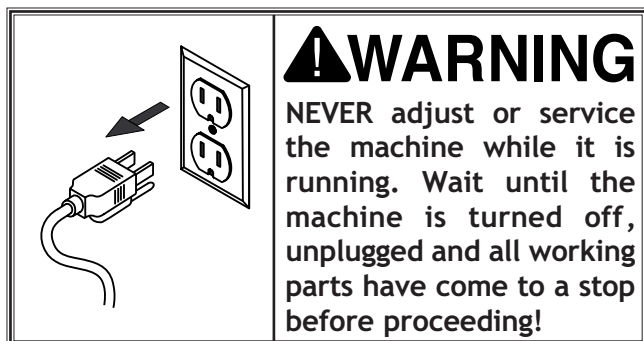

Check for the following conditions and repair or replace when necessary.

1. Loose mounting bolts.
2. Worn switch.
3. Worn or damaged cords and plugs.
4. Damaged drive belts.
5. Any other condition that could hamper the safe operation of this machine.

Lubrication

Since all bearings are shielded and permanently lubricated, simply leave them alone until they need to be replaced. Do not lubricate them.

For other items on this machine, such as the quill, table and column, an occasional application of light machine oil is all that is necessary. Before applying lubricant, clean off sawdust and metal chips.

Your goal is to achieve adequate lubrication. Too much lubrication will attract dirt and sawdust. Various parts of your machine could lose their freedom of movement as a result.

Table and Base

Keep the table and other unpainted surfaces rust-free with regular applications of products like Boeshield® T-9. For long term storage consider products like Kleen Bore's Rust Guardit™.

Sanding Sleeves

As sanding drums are used, the abrasive sleeve will quickly become "loaded" with sawdust. If not removed, this sawdust will harden on the abrasive surface, rendering the sleeve useless. Routinely clean the sanding sleeve with a rubber gum abrasive cleaner like the PRO-STIK® cleaners as shown on Page 33.

Always discard worn sanding sleeves. As abrasive sleeves begin to wear, grit will begin to fall off and cause gouges in the workpiece. Glue used to hold the grit to the paper will rub off onto the workpiece interfering with the final finish.


NOTICE

Contrary to some beliefs, worn abrasives are not the equivalent the next finer grit abrasive. Discard worn sanding sleeves and avoid the temptation to use them beyond their usable life.

Troubleshooting

Use this table to isolate and correct any problems with your drill press. If you cannot correct a problem, contact Woodstock International, Inc. at 1-360-734-3482 or tech-support@shopfox.biz.

| SYMPTOM | POSSIBLE REASON | HOW TO REMEDY |
|--|---|--|
| The drill press does not start. | <ol style="list-style-type: none"> 1. The pulley cover is not closed. 2. The power supply circuit breaker is tripped. 3. The power supply cord is damaged or has a poor connection. 4. The drill press power switch is at fault or is missing the yellow safety key. 5. The belt cover safety switch is at fault. 6. The motor is at fault. | <ol style="list-style-type: none"> 1. Make sure there are no obstructions and close the pulley cover. 2. Get a qualified electrician to troubleshoot and correct the cause for the circuit breaker or fuse trip. 3. Make sure all connections are good, and replace the power supply cord if damaged. 4. Insert the safety key, and/or replace the power switch. 5. Replace the safety switch; do not repair it. 6. Replace the motor. |
| Drilling stops, but the motor still operates. | <ol style="list-style-type: none"> 1. The belt is loose or worn. 2. The pulley for the spindle shaft or the motor is slipping on the shaft. | <ol style="list-style-type: none"> 1. Replace and/or adjust the belt. 2. To resecure the pulley, do these steps: <ol style="list-style-type: none"> a. UNPLUG THE DRILL PRESS. b. Remove the setscrew on the slipping pulley. c. Align the flat spot on the pulley shaft with the setscrew hole. d. Reinstall and tighten the setscrew. |
| The chuck wobbles or is loose on the spindle shaft. | <ol style="list-style-type: none"> 1. The chuck-retaining bolt is loose or missing. 2. Foreign material is stuck between the chuck-to-spindle mating surface. | <ol style="list-style-type: none"> 1. Install and tighten a new chuck-retaining bolt. 2. Remove the chuck and clean and de-burr the tapered chuck and spindle mating surfaces, then reassemble. |
| The drill press does not oscillate. | <ol style="list-style-type: none"> 1. The oscillator belt is broken. 2. The oscillation mechanism is at fault. | <ol style="list-style-type: none"> 1. Replace and/or adjust the belt. 2. Remove the oscillating mechanism and replace the broken parts. |
| The spindle does not retract completely in the uppermost position or it binds. | <ol style="list-style-type: none"> 1. The oscillator is not in the parked position. 2. The quill shaft is gummy with sawdust and oil. 3. The feed shaft return spring is weak. 4. The quill deflection screw is binding the quill. | <ol style="list-style-type: none"> 1. Open the belt cover and rotate the oscillator pulley until the quill is fully seated up into the headstock, indicating the oscillator is parked. 2. Clean the gummy substance with penetrating oil and lubricate with a light coat of oil. 3. Increase the feed shaft return spring tension. 4. Loosen the jam nut, and slightly turn out the screw where the quill binds. Retighten the jam nut and recheck for binding and looseness at all spindle locations. |
| The quill has excessive deflection. | <ol style="list-style-type: none"> 1. The quill shaft is at fault. 2. The quill and/or bearings are worn. | <ol style="list-style-type: none"> 1. Adjust the quill screw as described on Page 15. 2. Replace the quill and/or bearings. |

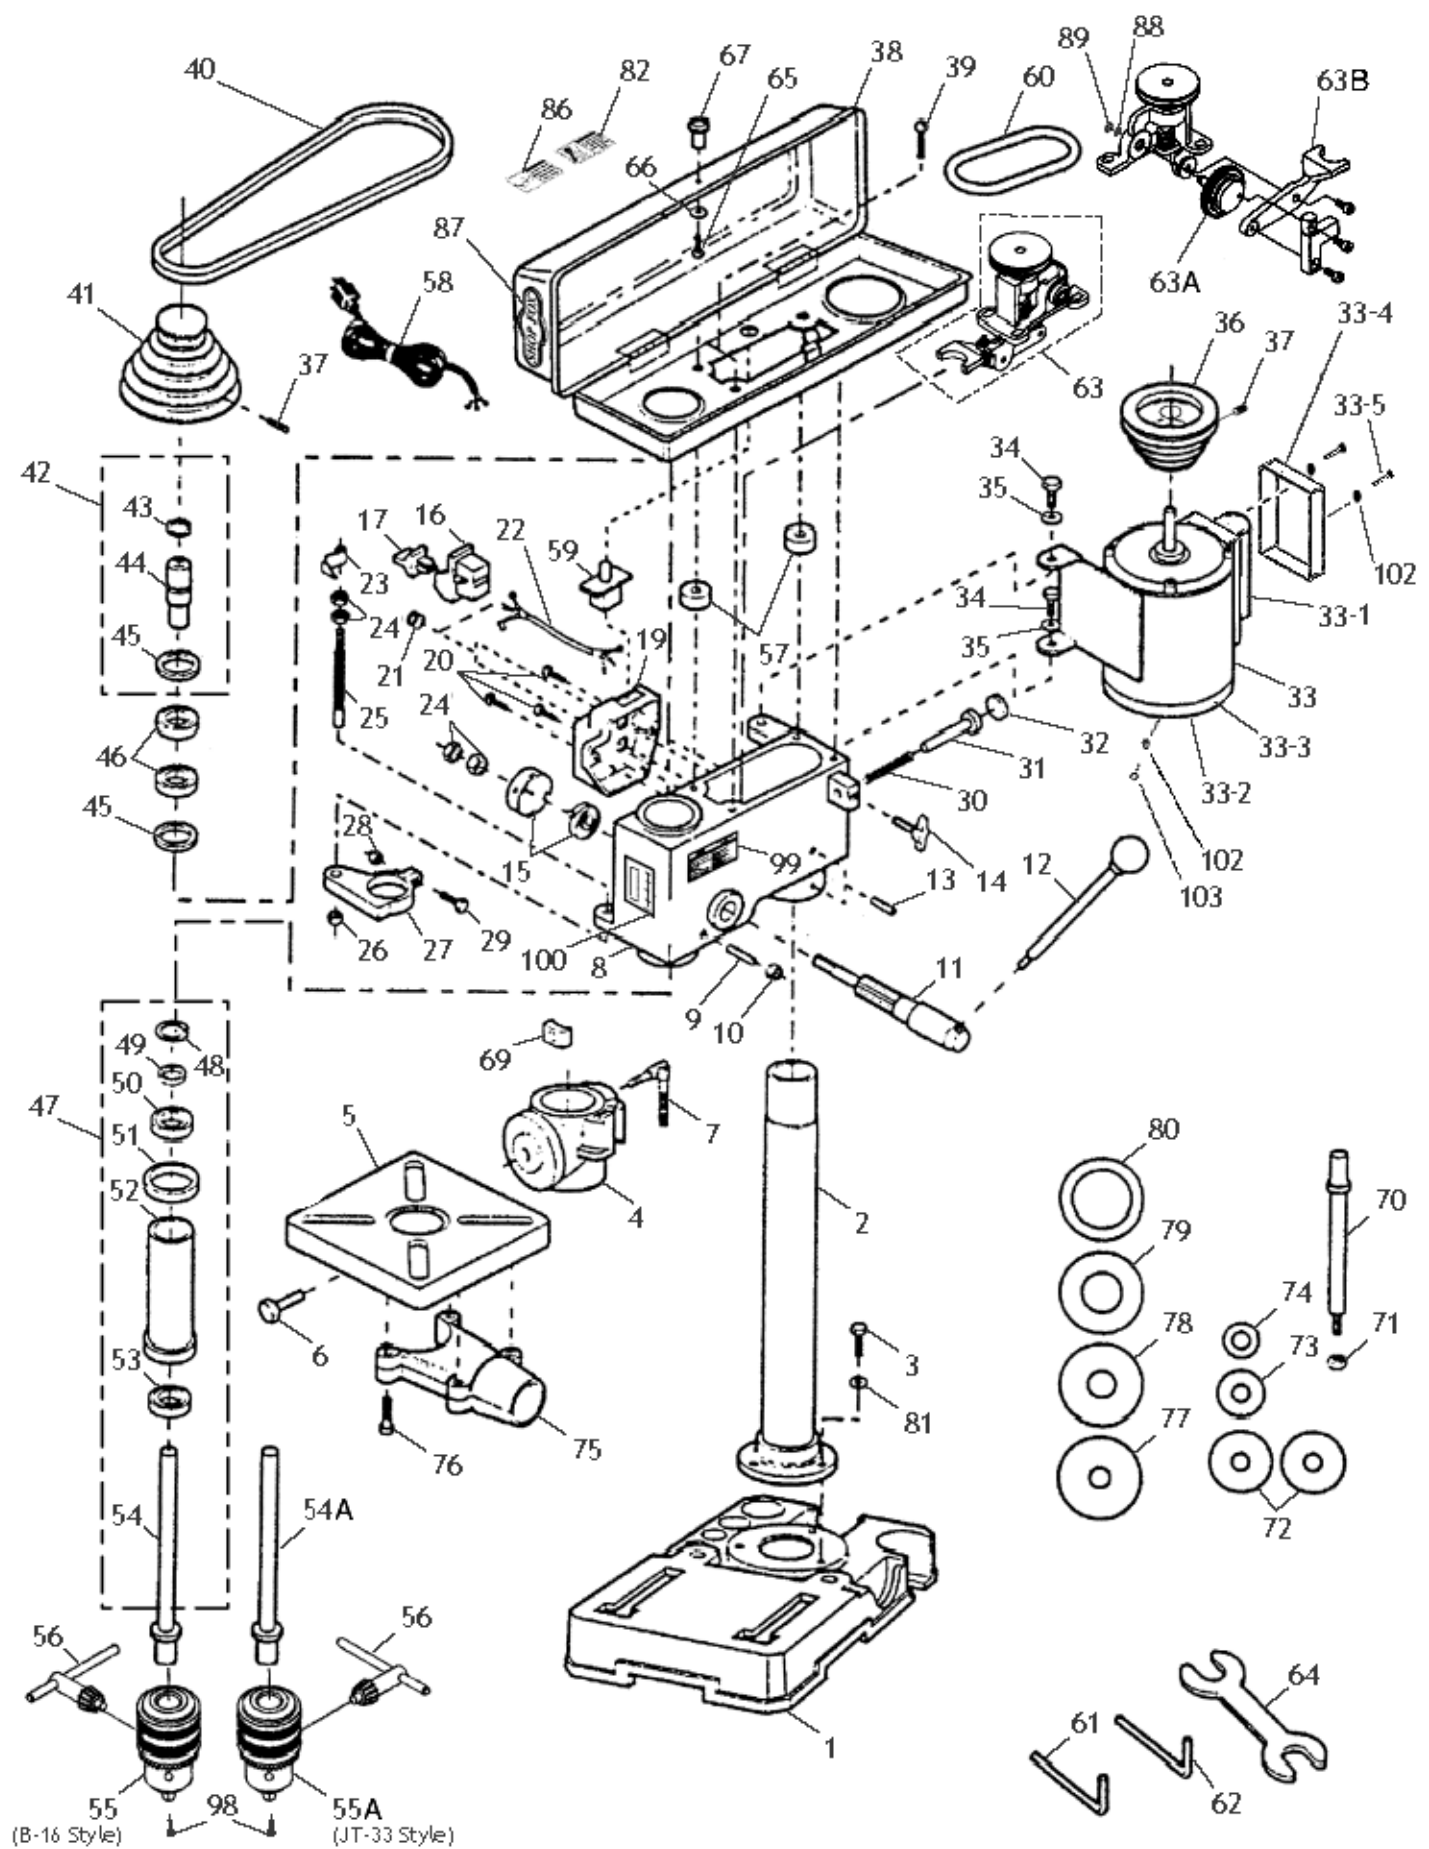

| REF | PART # | DESCRIPTION |
|------|------------|---------------------------|
| 1 | X1667001 | BASE |
| 2 | X1667002 | COLUMN |
| 3 | XPB09M | HEX BOLT M8-1.25 X 20 |
| 4 | X1667004 | TABLE BRACKET |
| 5 | X1667005 | TABLE |
| 6 | XPB25M | HEX BOLT M12-1.75 X 25 |
| 7 | X1667007 | LOCK HANDLE M10 |
| 8 | X1667008 | HEAD CASTING |
| 9 | X1667009 | SPECIAL DEFLECTION SCREW |
| 10 | XPN01M | HEX NUT M6-1.0 |
| 11 | X1667011 | FEED SHAFT |
| 12 | X1667012 | HANDLE BAR |
| 13 | XPSS25M | SET SCREW M6-1.0 X 18 |
| 14 | X1667014 | THUMB SCREW |
| 15 | X1667015 | RETURN SPRING ASSY. |
| 16 | X1666009 | SWITCH |
| 17 | XPSW09 | SWITCH KEY |
| 19 | X1667019 | SWITCH COVER |
| 20 | XPS32M | PHLP HD SCR M4-.7 X 10 |
| 21 | X1667021 | STRAIN RELIEF |
| 22 | X1667022 | SWITCH CORD |
| 23 | X1667023 | DEPTH STOP POINTER |
| 24 | XPN14M | HEX NUT M10-1.0 |
| 25 | X1667025 | DEPTH STOP ROD |
| 26 | XPN03M | HEX NUT M8-1.25 |
| 27 | X1667027 | DEPTH ROD BRACKET |
| 28 | XPN01M | HEX NUT M6-1.0 |
| 29 | XPB10M | HEX BOLT M6-1.0 X 25MM |
| 30 | X1667030 | SPRING |
| 31 | X1667031 | PUSH ROD |
| 32 | X1667032 | RUBBER PAD |
| 33 | X1667033 | MOTOR 1/2 HP, 110V |
| 33-1 | X1667033-1 | S. CAPACITOR 300V-20M |
| 33-2 | X1667033-2 | FAN |
| 33-3 | X1667033-3 | FAN COVER |
| 33-4 | X1667033-4 | MOTOR BOX COVER |
| 33-5 | X1667033-5 | MOTOR BOX COVER SCREW |
| 34 | XPB03M | HEX BOLT M8-1.25 X 16 |
| 35 | XPW01M | FLAT WASHER M8 |
| 36 | X1667036 | MOTOR PULLEY |
| 37 | XPSS01M | SET SCREW M6-1.0 X 10MM |
| 38 | X1667038 | PULLEY COVER |
| 39 | XPS22M | PHLP HD SCR M6-1.0 X 20 |
| 40 | X1667040 | V-BELT |
| 41 | X1667041 | SPINDLE PULLEY |
| 42 | X1667042 | DRIVE SLEEVE ASSY (43-45) |
| 43 | XPR08M | EXT RETAINING RING 19MM |
| 44 | X1667044 | SLEEVE (SQUARE SPLINED) |
| 44A | X1667044A | SLEEVE (ROUND SPLINED) |
| 45 | XPR34M | INT RETAINING RING 40MM |

| REF | PART # | DESCRIPTION |
|-----|-----------|-----------------------------|
| 46 | XP6203 | BALL BEARING 6203 |
| 47 | X1667047 | QUILL ASSEMBLY (48-54) |
| 48 | XPR48 | EXT RETAINING RING 11MM |
| 49 | X1667049 | COLLAR |
| 50 | XP6201 | BALL BEARING 6201 |
| 51 | X1667051 | COLLAR |
| 52 | X1667052 | QUILL |
| 53 | XP6201 | BALL BEARING 6201 |
| 54 | X1667054 | SPINDLE SHAFT (B-16 STYLE) |
| 54A | X1667054A | SPINDLE SHAFT (JT-33 STYLE) |
| 55 | X1667055 | CHUCK (B-16 STYLE) |
| 55A | X1667055A | CHUCK (JT-33 STYLE) |
| 56 | X1667056 | CHUCK KEY |
| 57 | X1667057 | COVER SPACER |
| 58 | X1667058 | POWER CORD |
| 59 | X1667059 | SAFETY SWITCH |
| 60 | X1667060 | OSCILLATOR BELT |
| 61 | XPAW03M | 3MM HEX WRENCH |
| 62 | XPAW04M | 4MM HEX WRENCH |
| 63 | X1667063 | OSCILLATING MECHANISM ASSY. |
| 63A | X1667063A | PLASTIC RING GEAR |
| 63B | X1667063B | OSCILLATING MECH. ARM |
| 64 | X1667064 | 14MM X 1/2" WRENCH |
| 65 | XPS22M | PHLP HD SCR M5-.7 X 14 |
| 66 | XPW02M | FLAT WASHER M5 |
| 67 | X1667067 | COVER KNOB M5-.7 |
| 69 | X1667069 | LOCK SHOE |
| 70 | X1667070 | MANDREL |
| 71 | X1PN30M | HEX NUT M8-1.25 |
| 72 | X1667072 | MANDREL WASHER 1 3/4" |
| 73 | X1667073 | MANDREL WASHER 7/8" |
| 74 | X1667074 | MANDREL WASHER 5/8" |
| 75 | X1667075 | DUST PORT (2PC) |
| 76 | XPS33M | PHLP HD SCR M4-0.7 X 22 |
| 77 | X1667077 | TABLE INSERT 5/8" |
| 78 | X1667078 | TABLE INSERT 1" |
| 79 | X1667079 | TABLE INSERT 1 5/8" |
| 80 | X1667080 | TABLE INSERT 1 7/8" |
| 81 | XPW01M | FLAT WASHER M8 |
| 82 | X1667082 | LABEL (LONG HAIR SAFETY) |
| 86 | X1667086 | LABEL (SAFETY GLASSES) |
| 87 | X1667087 | LABEL (SHOP FOX) |
| 88 | XPW01M | FLAT WASHER M8 |
| 89 | XPR36M | EXT RETAINING RING 7MM |
| 98 | XPSB15M | CAP SCREW M5-0.8 X 20 |
| 99 | X1667099 | LABEL (MACHINE ID) |
| 100 | X1667100 | LABEL (DEPTH CHART) |
| 102 | XPW05M | FLAT WASHER M4 |
| 103 | XPS01M | PHLP HD SCREW M4-0.7 X 8 |

Drill Press Accessories

The following drill press accessories may be available through your local Woodstock International Inc. Dealer. If you do not have a dealer in your area, these products are also available through online dealers. Please call or e-mail Woodstock International Inc. Customer Service to get a current listing of dealers at: 1-800 840-8420 or at sales@woodstockint.com.

Sanding Sleeves are sized to fit the D2677 Drum Sander Set. These hard Sanding Sleeves are available in 60, 80, 100, 120, and 150 grits. Keep plenty of these consumable Sanding Sleeves on hand.

| Sanding Sleeves | | | | | |
|----------------------|---------|---------|----------|----------|----------|
| Size (Dia. x Ht.) | 60 Grit | 80 Grit | 100 Grit | 120 Grit | 150 Grit |
| 1" X 4 1/4" | D2683 | D2684 | D2685 | D2686 | D2687 |
| 1 1/2" X 4 1/4" | D2688 | D2689 | D2690 | D2691 | D2692 |
| 2" X 4 1/4" | D2693 | D2694 | D2695 | D2696 | D2697 |



The 4" PRO-STIK® Stick with Handle is the easiest solution for increasing the life of sanding sleeves by removing pitch and sawdust particles from the abrasive pores, which later harden in place if not removed. Simply press the cleaner lightly against the moving abrasive surface to remove clogged-up pitch and sawdust. PRO-STIK® cleaners are available in other sizes for any cleaning application that would need cleaners with handles, as blocks, or as flat pads. (Not recommended for wide-belt sanders.)




D2677 Drum Sander Set includes three rubber sanding drums 4 1/4" in length to accommodate 1", 1 1/2" and 2" diameter sanding sleeves. This kit also includes one 80 grit sleeve for each drum to get things started.



D2722 Mandrel is a 3/8" shank and is required to use our Drum Sander Set with any machine. Mandrel is included with the **SHOP FOX®** Oscillating Drill Presses featured above.


Drill Press Clamps adjust quickly and easily to lock your workpiece in any position. The clamping pad pivots to conform to any workpiece, ensuring uniform pressure.

- W1301 6" Drill Press Clamp (1 1/2" Capacity)
- D2192 10" Drill Press Clamp (3" Capacity)
- D2493 12" Drill Press Clamp (5" Capacity)

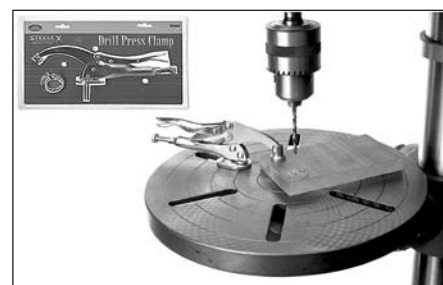

SHOP FOX® Drill Press Vises use precision ground steel guide rods, smooth-action Acme threads, ground steel jaws, with fixed jaw V-grooves for holding round stock, and dovetailed ways where applicable.

- D2727 SHOP FOX® (3" Basic Vise)
- D2728 SHOP FOX® (4" Basic Vise)
- D2729 SHOP FOX® (6" Basic Vise)
- D2933 SHOP FOX® (3 3/4" Angle Vise)
- D2730 SHOP FOX® (3" Cross Sliding Vise)
- D2731 SHOP FOX® (4" Cross Sliding Vise)

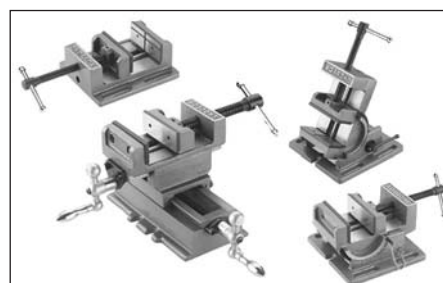

Drill Press Accessories

The SHOP FOX® D2056 Tool Table is great for bench-top tools like chop saws, drill presses, planers, scroll saws and bandsaws. Support cross braces on top provide incredible strength and capacity. Flared legs and adjustable rubber feet ensure stability and reduce machine vibration. Butcher block finish table top measures 13" x 23" and is 30½" tall with a 700 lb. capacity.




D2251 Steelex® Adjustable Circle Cutter cuts flat-sided holes in wood from 1" to 5". Made of M-2 alloy steel, this Circle Cutter features a ¾" hex shank, ⅝" drill, center point and Allen® wrench.



D3161 Steelex® Heavy-Duty Carbide-Tipped Adjustable Circle Cutter is Carbide Tipped and cuts 1¾" to 5¾" diameter holes in the toughest material. For use with ½" drill press chucks. Includes hex wrench and ⅞" pilot drill.

Woodstock offers a full line of Brad Point Bits, Tenon/Plug Cutters, Countersink Bits, and Stubby Drill Bits to satisfy every need. Whether for do-it-yourselfers or professional woodworkers, you can depend on Woodstock International Inc. to manufacture a useful selection of drilling and cutting tools. Refer to <http://www.woodstockint.com/drilling.cfm> for a complete product line available through your dealer.

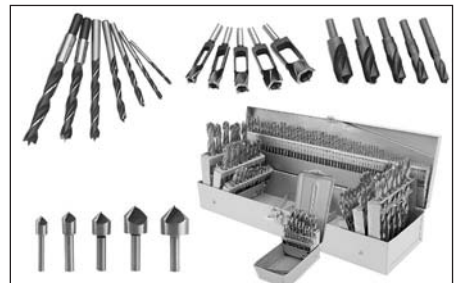

Steelex® Carded Forstner Bits stack up as some of the best bits in the world. In fact, an independent testing lab proved that the Steelex® brand cut was equal to or better than Forstner Bits from Austria, known for being the best. For use with drill presses. Refer to <http://www.woodstockint.com/forstner.cfm> for a complete product line available through your dealer.



Steelex Plus® Bi-Metal Hole Saws stay sharper longer than carbon steel hole saws. Equipped with high-speed steel alloy cutting teeth bonded to a welded steel body, they cut wood, metal and plastics with ease.

- D2784 10-pc. Bi-Metal Hole Saw Set
- D2020 8-pc. Aggressive Hole Saw Set
- D2783 6-pc. Bi-Metal Hole Saw Set
- D2797 ½" X 20 UNF Hole Saw Arbor
- D2798 ⅝" X 18 UNF Hole Saw Arbor
- D2799 12" Hole-Saw Arbor Extension
- D2928 Replacement Pilot Drill for D2797
- D2929 Replacement Pilot Drill for D2798



WARRANTY CARD

Name _____
Street _____
City _____ State _____ Zip _____
Phone Number _____ E-Mail _____ FAX _____
MODEL _____ SERIAL # _____


The following information is given on a voluntary basis and is strictly confidential.

1. Where did you purchase your **SHOP FOX®** machine?
Store? _____ City? _____
2. How did you first learn about us?
____ Advertisement ____ Friend
____ Mail order Catalog ____ Local Store
____ World Wide Web Site
____ Other _____
3. Which of the following magazines do you subscribe to.
____ American Woodworker ____ Today's Homeowner
____ Cabinetmaker ____ WOOD
____ Family Handyman ____ Wooden Boat
____ Fine Homebuilding ____ Woodshop News
____ Fine Woodworking ____ Woodsmith
____ Home Handyman ____ Woodwork
____ Journal of Light Construction ____ Woodworker
____ Old House Journal ____ Woodworker's Journal
____ Popular Mechanics ____ Workbench
____ Popular Science ____ American How-To
____ Popular Woodworking
____ Other _____
4. Which of the following woodworking/remodeling shows do you watch?
____ Backyard America ____ The New Yankee Workshop
____ Home Time ____ This Old House
____ The American Woodworker ____ Woodwright's Shop
____ Other _____
5. What is your annual household income?
____ \$20,000-\$29,999 ____ \$60,000-\$69,999
____ \$30,000-\$39,999 ____ \$70,000-\$79,999
____ \$40,000-\$49,999 ____ \$80,000-\$89,999
____ \$50,000-\$59,999 ____ \$90,000 +
6. What is your age group?
____ 20-29 ____ 50-59
____ 30-39 ____ 60-69
____ 40-49 ____ 70 +
7. How long have you been a woodworker?
____ 0 - 2 Years ____ 8 - 20 Years
____ 2 - 8 Years ____ 20+ Years
8. How would you rank your woodworking skills?
____ Simple ____ Advanced
____ Intermediate ____ Master Craftsman
9. How many **SHOP FOX®** machines do you own? _____
10. What stationary woodworking tools do you own? Check all that apply.
____ Air Compressor ____ Panel Saw
____ Band Saw ____ Planer
____ Drill Press ____ Power Feeder
____ Drum Sander ____ Radial Arm Saw
____ Dust Collector ____ Shaper
____ Horizontal Boring Machine ____ Spindle Sander
____ Jointer ____ Table Saw
____ Lathe ____ Vacuum Veneer Press
____ Mortiser ____ Wide Belt Sander
____ Other _____
11. Which benchtop tools do you own? Check all that apply.
____ 1" x 42" Belt Sander ____ 6" - 8" Grinder
____ 5" - 8" Drill Press ____ Mini Lathe
____ 8" Table Saw ____ 10" - 12" Thickness Planer
____ 8" - 10" Bandsaw ____ Scroll Saw
____ Disc/Belt Sander ____ Spindle/Belt Sander
____ Mini Jointer
____ Other _____
12. Which portable/hand held power tools do you own? Check all that apply.
____ Belt Sander ____ Orbital Sander
____ Biscuit Joiner ____ Palm Sander
____ Circular Saw ____ Portable Planer
____ Detail Sander ____ Saber Saw
____ Drill/Driver ____ Reciprocating Saw
____ Miter Saw ____ Router
____ Other _____
13. What machines/supplies would you like to see?
____ 12" Table Saw ____ Radial Arm Saw
____ 12" Jointer ____ Panel Saw
____ Combination Planer/Jointer ____ Brass Hardware
____ Paint & Finish Supplies ____ Lumber
____ Contractor's Supplies
____ other _____
14. What new accessories would you like Woodstock International to carry?

15. Do you think your purchase represents good value?
____ Yes ____ No
16. Would you recommend **SHOP FOX®** products to a friend?
____ Yes ____ No
17. Comments: _____

CUT ALONG DOTTED LINE

FOLD ALONG DOTTED LINE



Place
Stamp
Here



WOODSTOCK INTERNATIONAL, INC.
P.O. BOX 2309
BELLINGHAM, WA 98227-2309



FOLD ALONG DOTTED LINE

TAPE ALONG EDGES--PLEASE DO NOT STAPLE

