

Grizzly Industrial®

CORPORATE HEADQUARTERS

P.O. BOX 2069, BELLINGHAM, WA, U.S.A.

TELEPHONE: (360) 647-0801 • FAX: (360) 676-1123

June, 2019

Introducing the Grizzly Model G0888 Deluxe Bench Grinding Station




Dual 2½" dust collection inlets

*Grinder not
Included*



New!

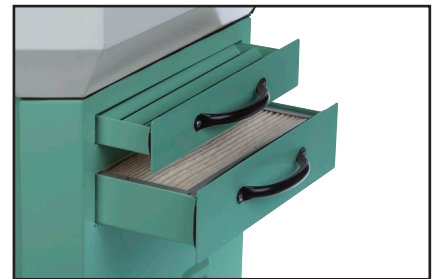

Easy-access dust collection
drawers and filter for dust
disposal

MADE IN TAIWAN

MACHINE HIGHLIGHTS (see *Machine Data Sheet* for full specifications)

- Motor: 1 HP, 115V, 60Hz, single-phase, 9A, TEFC capacitor-start induction.
- Dust collection: Dual 2½" inlets, 280 CFM airflow performance, and 10-micron filtration rating.
- Equipped with an LED overhead light, stainless steel water cups for quenching parts, vibration-dampening rubber feet, easy-access dust collection and filter drawers, two on-board power outlets, built-in casters for mobility, and a large safety stop paddle switch.
- Fits a wide range of grinders, with eight mounting channels compatible with nearly any mounting bolt configuration.
- CSA certified.
- Weighs approximately 218 lbs.

The Model G0888 is available for \$1395 and is covered by a one-year warranty. For more information call **1-800-523-4777** or visit **www.grizzly.com**.

Due to rapidly changing market conditions our prices may be increased at any time without prior notice. Our website is updated with any changes as they occur.



MACHINE DATA SHEET

Customer Service #: (570) 546-9663 · To Order Call: (800) 523-4777 · Fax #: (800) 438-5901

MODEL G0888 DELUXE BENCH GRINDING STATION

Product Dimensions:

Weight 218 lbs.
Width (side-to-side) x Depth (front-to-back) x Height 24-1/2 x 30-1/2 x 63-1/2 in.
Footprint (Width x Depth)..... 17-1/4 x 17 in.

Shipping Dimensions:

Type Crate
Contents..... Machine
Weight 235 lbs.
Length x Width x Height..... 24 x 25 x 45 in.
Must Ship Upright Yes

Electrical:

Power Requirement 115V, Single-Phase, 60 Hz
Full-Load Current Rating..... 9A
Minimum Circuit Size 15A
Connection Type Cord & Plug
Power Cord Included Yes
Power Cord Length 10 ft.
Power Cord Gauge 14 AWG
Plug Included NEMA 5-15
Switch Type ON/STOP Push Button Switch w/Large Shut-Off Safety Paddle

Motor:

Main

Horsepower 1 HP
Phase Single-Phase
Amps 9A
Speed 3450 RPM
Type..... TEFC Capacitor-Start Induction
Power Transfer..... Direct Drive
Bearings Shielded & Permanently Lubricated
Centrifugal Switch/Contacts Type Internal

Main Specifications:

Operation Information

Dust Collector Type..... Single Stage
Airflow Performance 280 CFM
Main Inlet Size..... 2-1/2 in.

Filter Information

Number of Filters 1
Total Filter Surface Area 19 sq. ft.
Filter Type Aluminum-Framed Pleated Filter
Filter Rating 99% of 10 Microns (MERV 9)
Filter Size (Length x Width x Thickness)..... 14-3/4 x 14-3/4 x 2-1/2 in.

Table Information

Table Width 18 in.
Table Depth 12-5/8 in.
Table Thickness 3/16 in.
Slot Width 3/8 in.

Impeller Information

Impeller Type..... Radial Fin
Impeller Size..... 11 in.
Impeller Blade Thickness 1/8 in.

Construction

Frame Steel
Side Walls Steel
Table..... Steel
Collection Drawer Steel
Casters Steel
Impeller..... Steel
Paint Type/Finish..... Powder Coated

Other Specifications:

Country of Origin..... Taiwan
Warranty..... 1 Year
Approximate Assembly & Setup Time 30 Minutes
Serial Number Location Machine ID Label
ISO 9001 Factory No
Certified by a Nationally Recognized Testing Laboratory (NRTL)..... Yes

Features:

- Two Onboard 115V Power Receptacles for Connection to Bench Grinders
- Built-In Mobile Base for Easy Movement
- Removable Clean-Out Drawer
- 12" LED Work Light
- Two Stainless-Steel Coolant Cups
- Work Table Mounted on Rubber Feet for Reduced Vibration