

# Grizzly Industrial®

CORPORATE HEADQUARTERS



P.O. BOX 2069, BELLINGHAM, WA, U.S.A.

TELEPHONE: (360) 647-0801 • FAX: (360) 676-1123

January, 2020

## Introducing the Grizzly Model G0897 4" x 48" 2-Wheel Metal Belt Grinder/Sander

**New!**

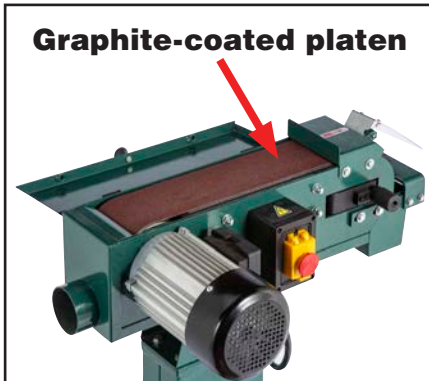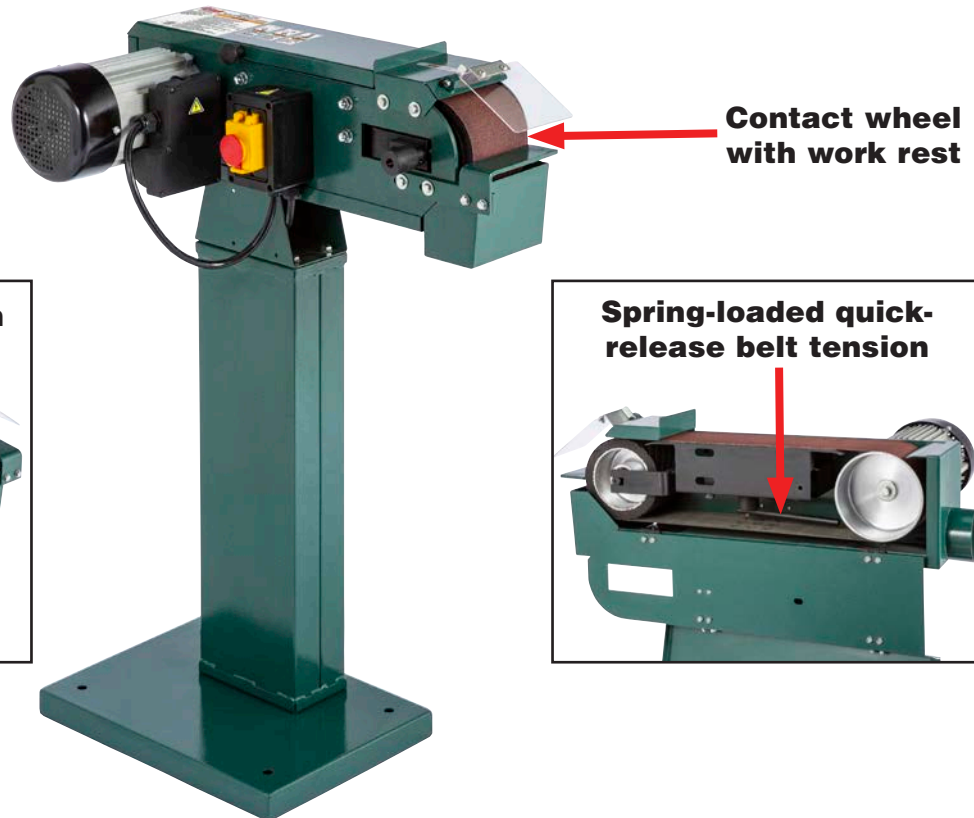

### **MACHINE HIGHLIGHTS (see Machine Data Sheet for full specifications)**

- Motor is 2 HP, 110V, single-phase, 13.8A, 3400 RPM.
- 4500 FPM belt speed, 4<sup>3</sup>/<sub>4</sub>" x 11<sup>1</sup>/<sub>8</sub>" graphite-coated platen with work stop, and a 4" wide x 5" dia. contact wheel with work rest for rapid material removal.
- Features spring-loaded quick-release belt tension and single-knob tracking adjustment.
- Equipped with a removable spark trap, transparent safety guard, and 3" dust port
- Weighs approximately 75 lbs.

The Model G0897 is available for \$499.95 and is covered by a one-year warranty. For more information call **1-800-523-4777** or visit **www.grizzly.com**.

Due to rapidly changing market conditions our prices may be increased at any time without prior notice. Our website is updated with any changes as they occur.



# MACHINE DATA SHEET

Customer Service #: (570) 546-9663 · To Order Call: (800) 523-4777 · Fax #: (800) 438-5901

## MODEL G0897 4" X 48" 2-WHEEL METAL BELT GRINDER/SANDER

### Product Dimensions:

Weight..... 75 lbs.  
Width (side-to-side) x Depth (front-to-back) x Height..... 15 x 25-1/2 x 35-1/2 in.  
Footprint (Length x Width)..... 16-1/2 x 12 in.

### Shipping Dimensions:

Type..... Wood Crate  
Content..... Machine  
Weight..... 86 lbs.  
Length x Width x Height..... 25 x 17 x 17 in.  
Must Ship Upright..... Yes

### Electrical:

Power Requirement..... 110V, Single-Phase, 60 Hz  
Full-Load Current Rating..... 13.8A  
Minimum Circuit Size..... 20A  
Connection Type..... Cord & Plug  
Power Cord Included..... Yes  
Power Cord Length..... 6 ft.  
Power Cord Gauge..... 14 AWG  
Plug Included..... Yes  
Included Plug Type..... 5-15  
Switch Type..... ON/OFF Push Button w/Safety Cover

### Motors:

#### Main

Horsepower..... 2 HP  
Phase..... Single-Phase  
Amps..... 13.8A  
Speed..... 3400 RPM  
Type..... TEFC Capacitor-Run Induction  
Power Transfer..... Direct Drive  
Bearings..... Shielded & Permanently Lubricated

### Main Specifications:

#### Belt Sander Info

Sanding Belt Width..... 4 in.  
Sanding Belt Length..... 48 in.  
Sanding Belt Speed..... 4500 FPM  
Contact Wheel Diameter..... 5 in.  
Contact Wheel Width..... 4 in.  
Belt Tension Release Type..... Quick Release  
Platen Type..... Graphite Coated  
Platen Length..... 11-1/8 in.  
Platen Width..... 4-3/4 in.

**Construction Materials**

Stand..... Formed Steel  
Frame..... Formed Steel  
Paint Type/Finish..... Enamel

**Other Related Info**

Number of Dust Ports..... 1  
Dust Port Size..... 3 in.

**Other Specifications:**

Country of Origin ..... China  
Warranty ..... 1 Year  
Approximate Assembly & Setup Time ..... 1 Hour  
Serial Number Location ..... ID Label  
ISO 9001 Factory ..... No

**Features:**

- Work Stop for Use with Platen
- Work Rest for Use with Contact Wheel
- Removable Spark Trap
- 3" Dust Port
- Transparent Safety Guard
- Single-Knob Tracking Adjustment
- Spring-Loaded Quick Release Belt